




Service Manual

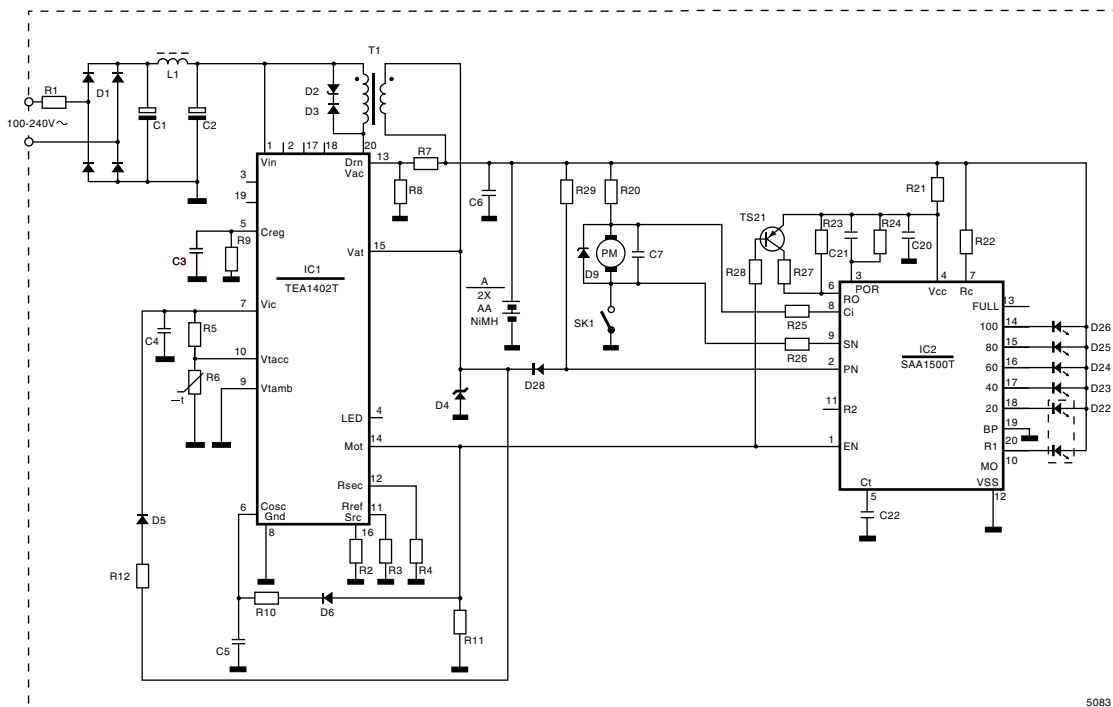


Input voltage	: 100-240V ~
Motor voltage	: 2.4V
Battery	: 2x AA NiMH
Cell capacity	: approx. 1100 mAh
Charging system	: S.O.P.S./ time control
Charging time	: approx. 60 mins initial 4 hours
Charging current	: 900/30 mA
Charge indicators	: 4x LED green 1x duoLED red/green

Comfort control : fixed setting
Shaving heads : HQ4 - 4822 690 30468
Screwdriver T8 : 4822 395 50263

SAP Coding : HQ4866

HQ 4866/A

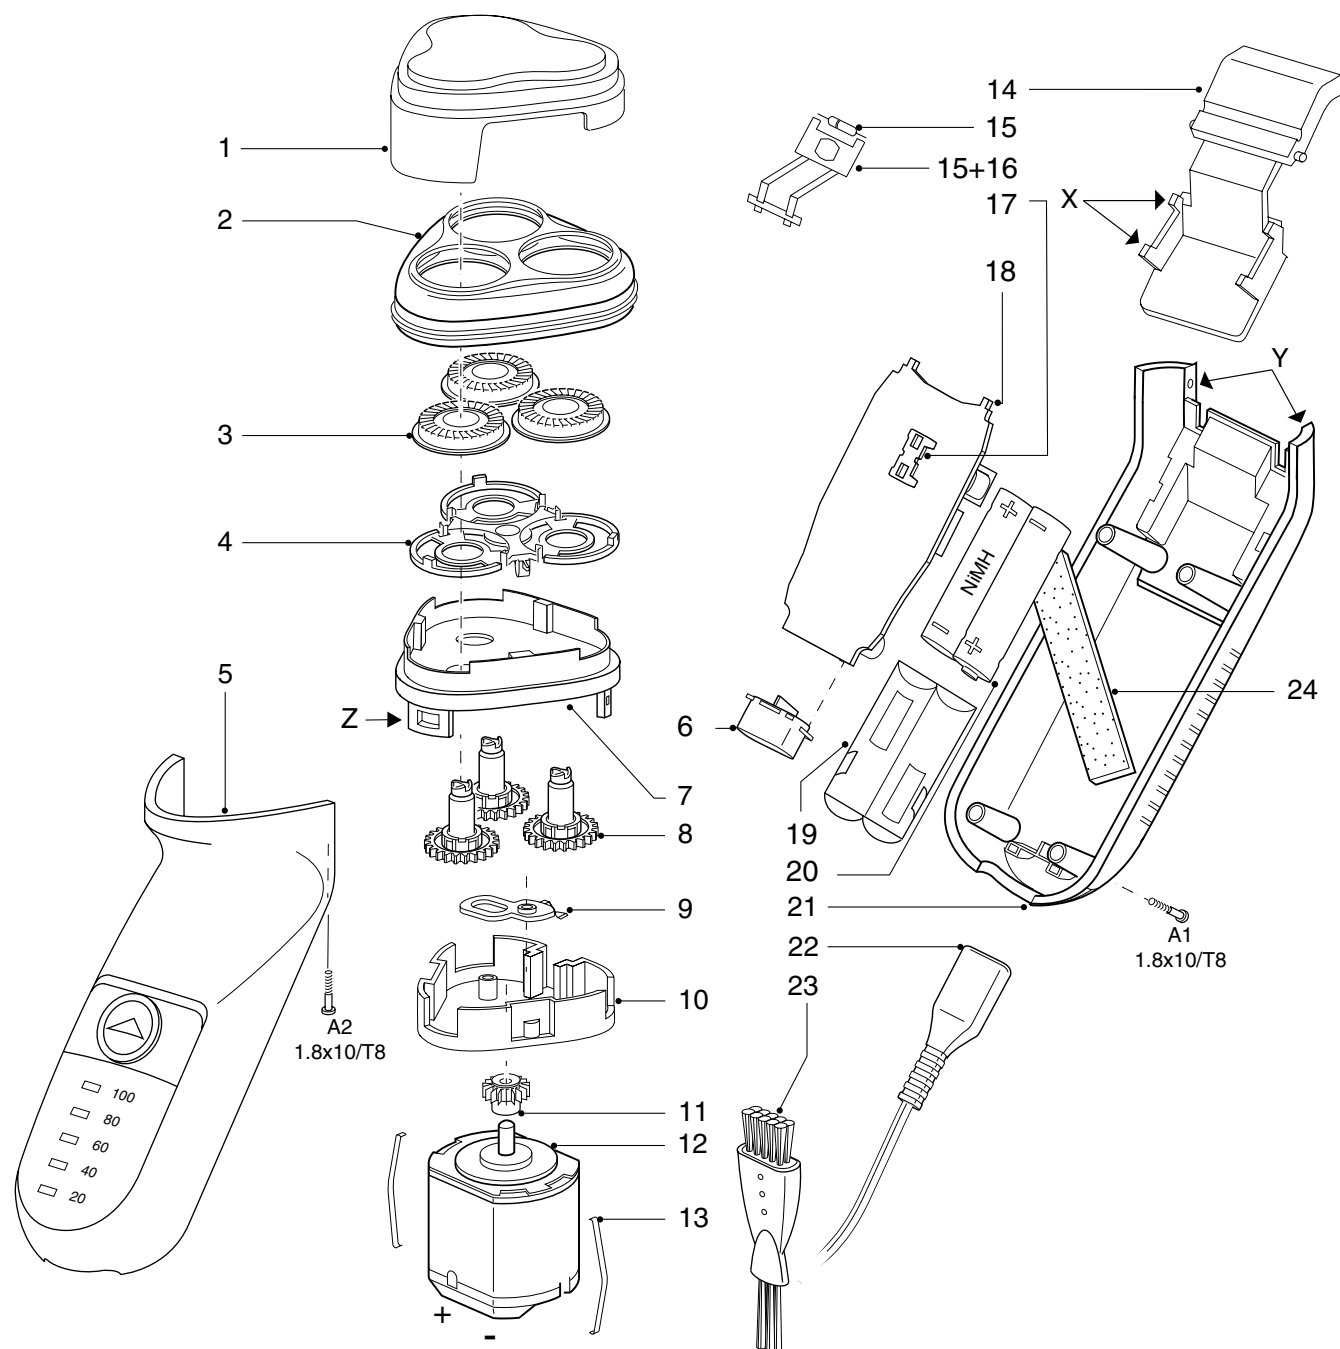

- | | | |
|----|----------------|-------------------|
| 1 | 4822 441 11276 | Protecting cap |
| 2 | 4222 036 01980 | Head holder |
| 3 | 4822 690 30468 | HQ4 shaving head |
| 4 | 4822 404 40728 | Retaining bracket |
| 5 | 4222 036 02680 | Housing |
| 6 | 4222 036 02370 | Inlet |
| 7 | 4222 036 02920 | Hairchamber |
| 8 | 4822 522 32852 | Gearwheel |
| 9 | 4822 404 40656 | Lever |
| 10 | 4822 441 11275 | Frame |
| 11 | 4822 522 32851 | Pinion |
| 12 | 4822 361 20936 | Motor |
| 13 | 4822 492 63165 | Motor clamp |
| 14 | 4822 690 10081 | Trimmer |
| 15 | 4822 130 34167 | Zener diode |

- | | | |
|----|----------------|----------------------|
| 16 | 4222 036 02390 | Motor connector |
| 17 | 4822 277 21689 | On/off switch |
| 18 | 4222 036 02690 | Power module |
| 19 | 4222 036 00620 | Battery holder |
| 20 | 4822 138 10728 | NiMH cell 2xAA |
| 21 | 4222 036 02660 | Cover |
| 22 | 4822 321 10095 | Flex EU |
| - | 4822 321 10096 | Flex GB |
| - | 4222 036 02480 | Flex ROK |
| - | 4822 321 10344 | Flex USA/CDN |
| 23 | 4822 479 30183 | Cleaning brush |
| 24 | 4822 466 12236 | Foam plate |
| A | 4822 502 30526 | S.t. screw 1.8x10/T8 |
| | 4222 036 00040 | Pouch |