




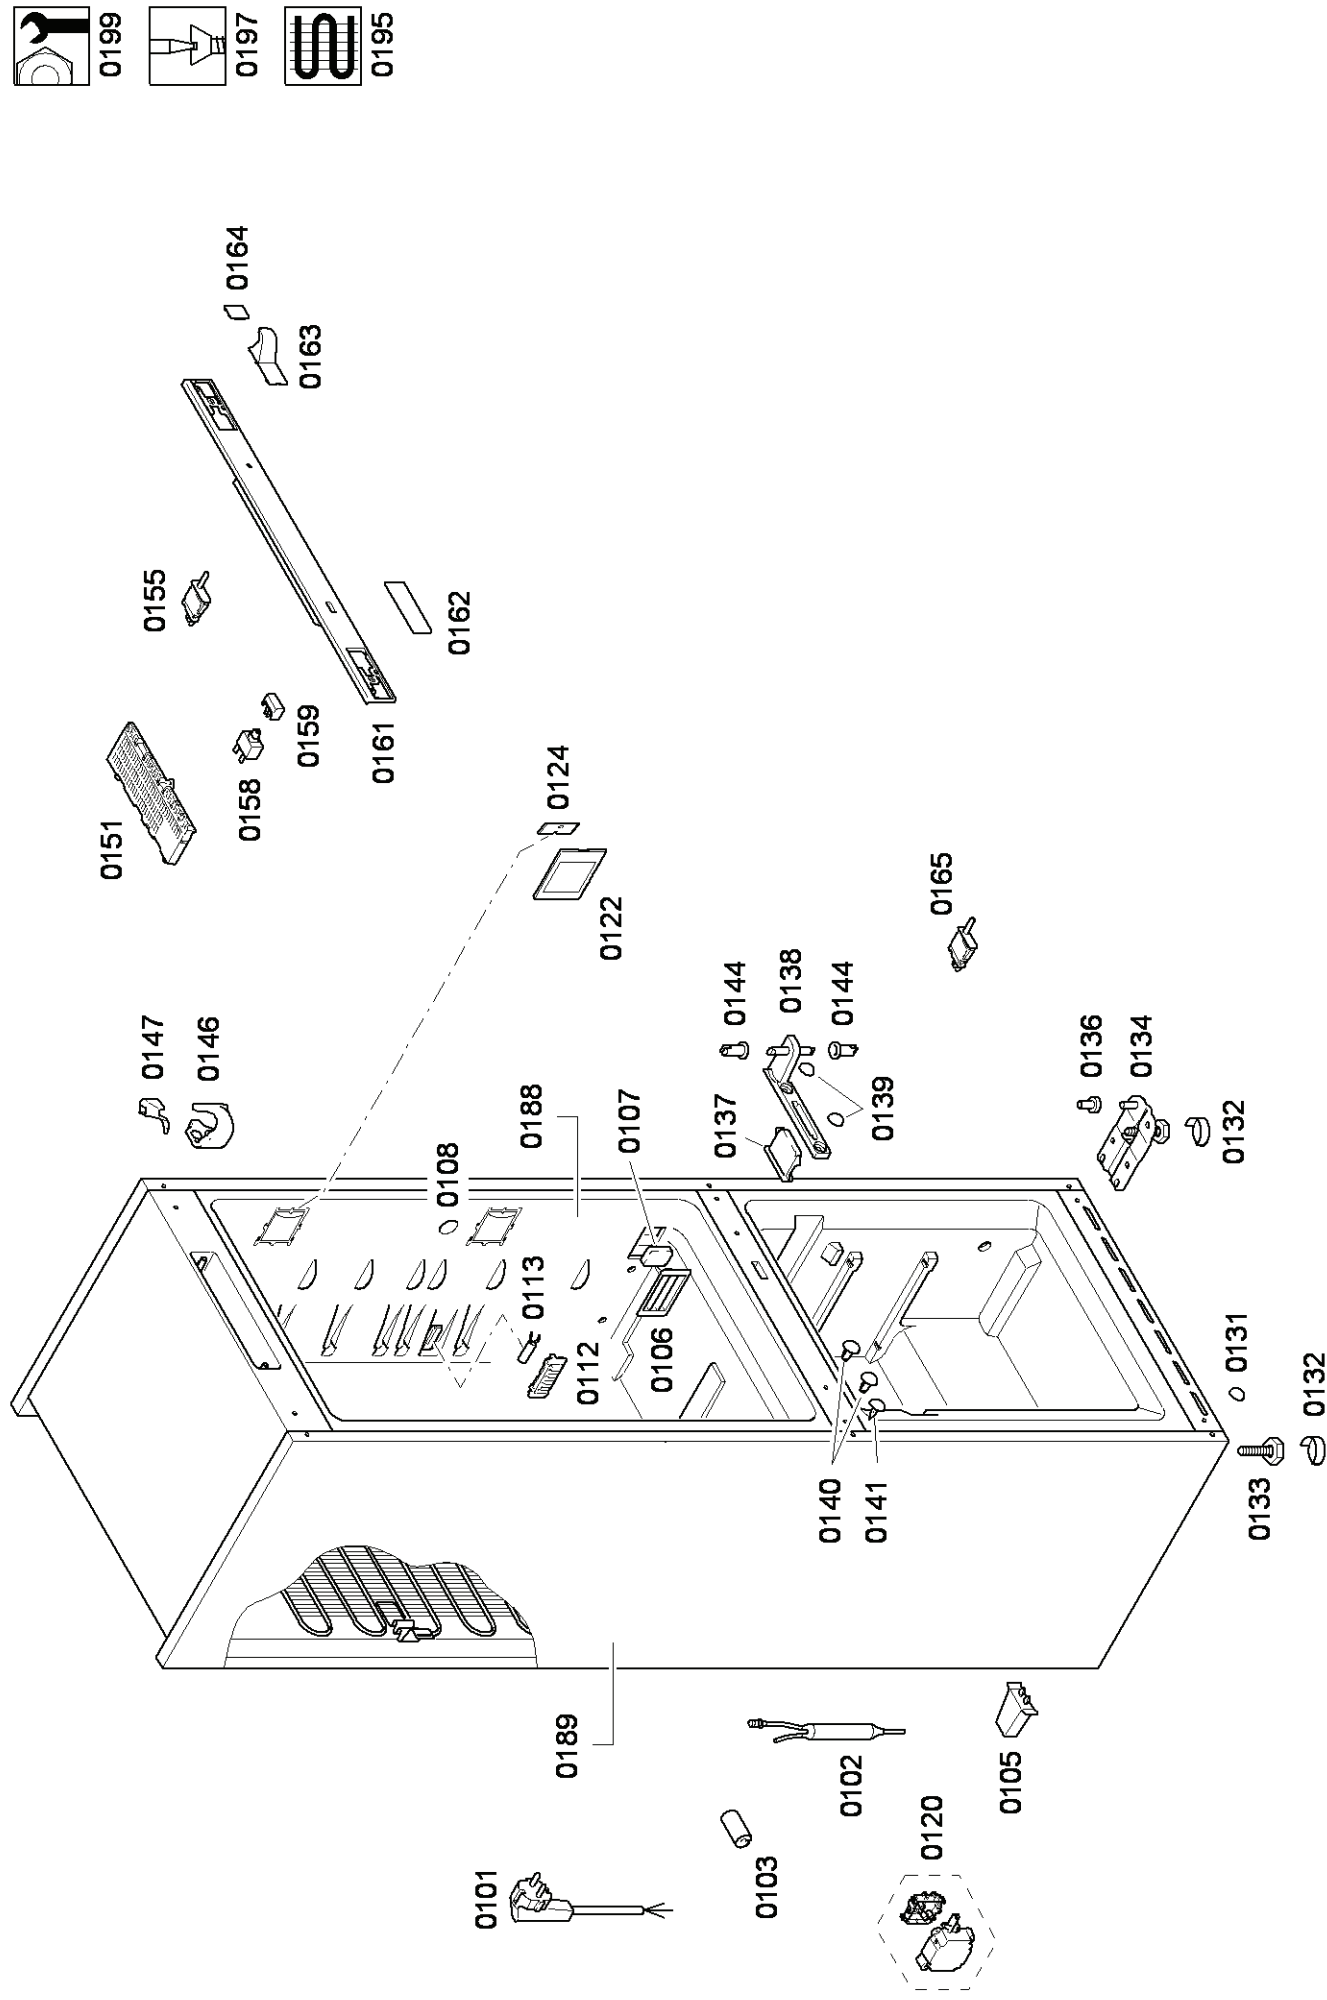


Combis libre instalac.

De libre instalación ≥ 60 cm anchura

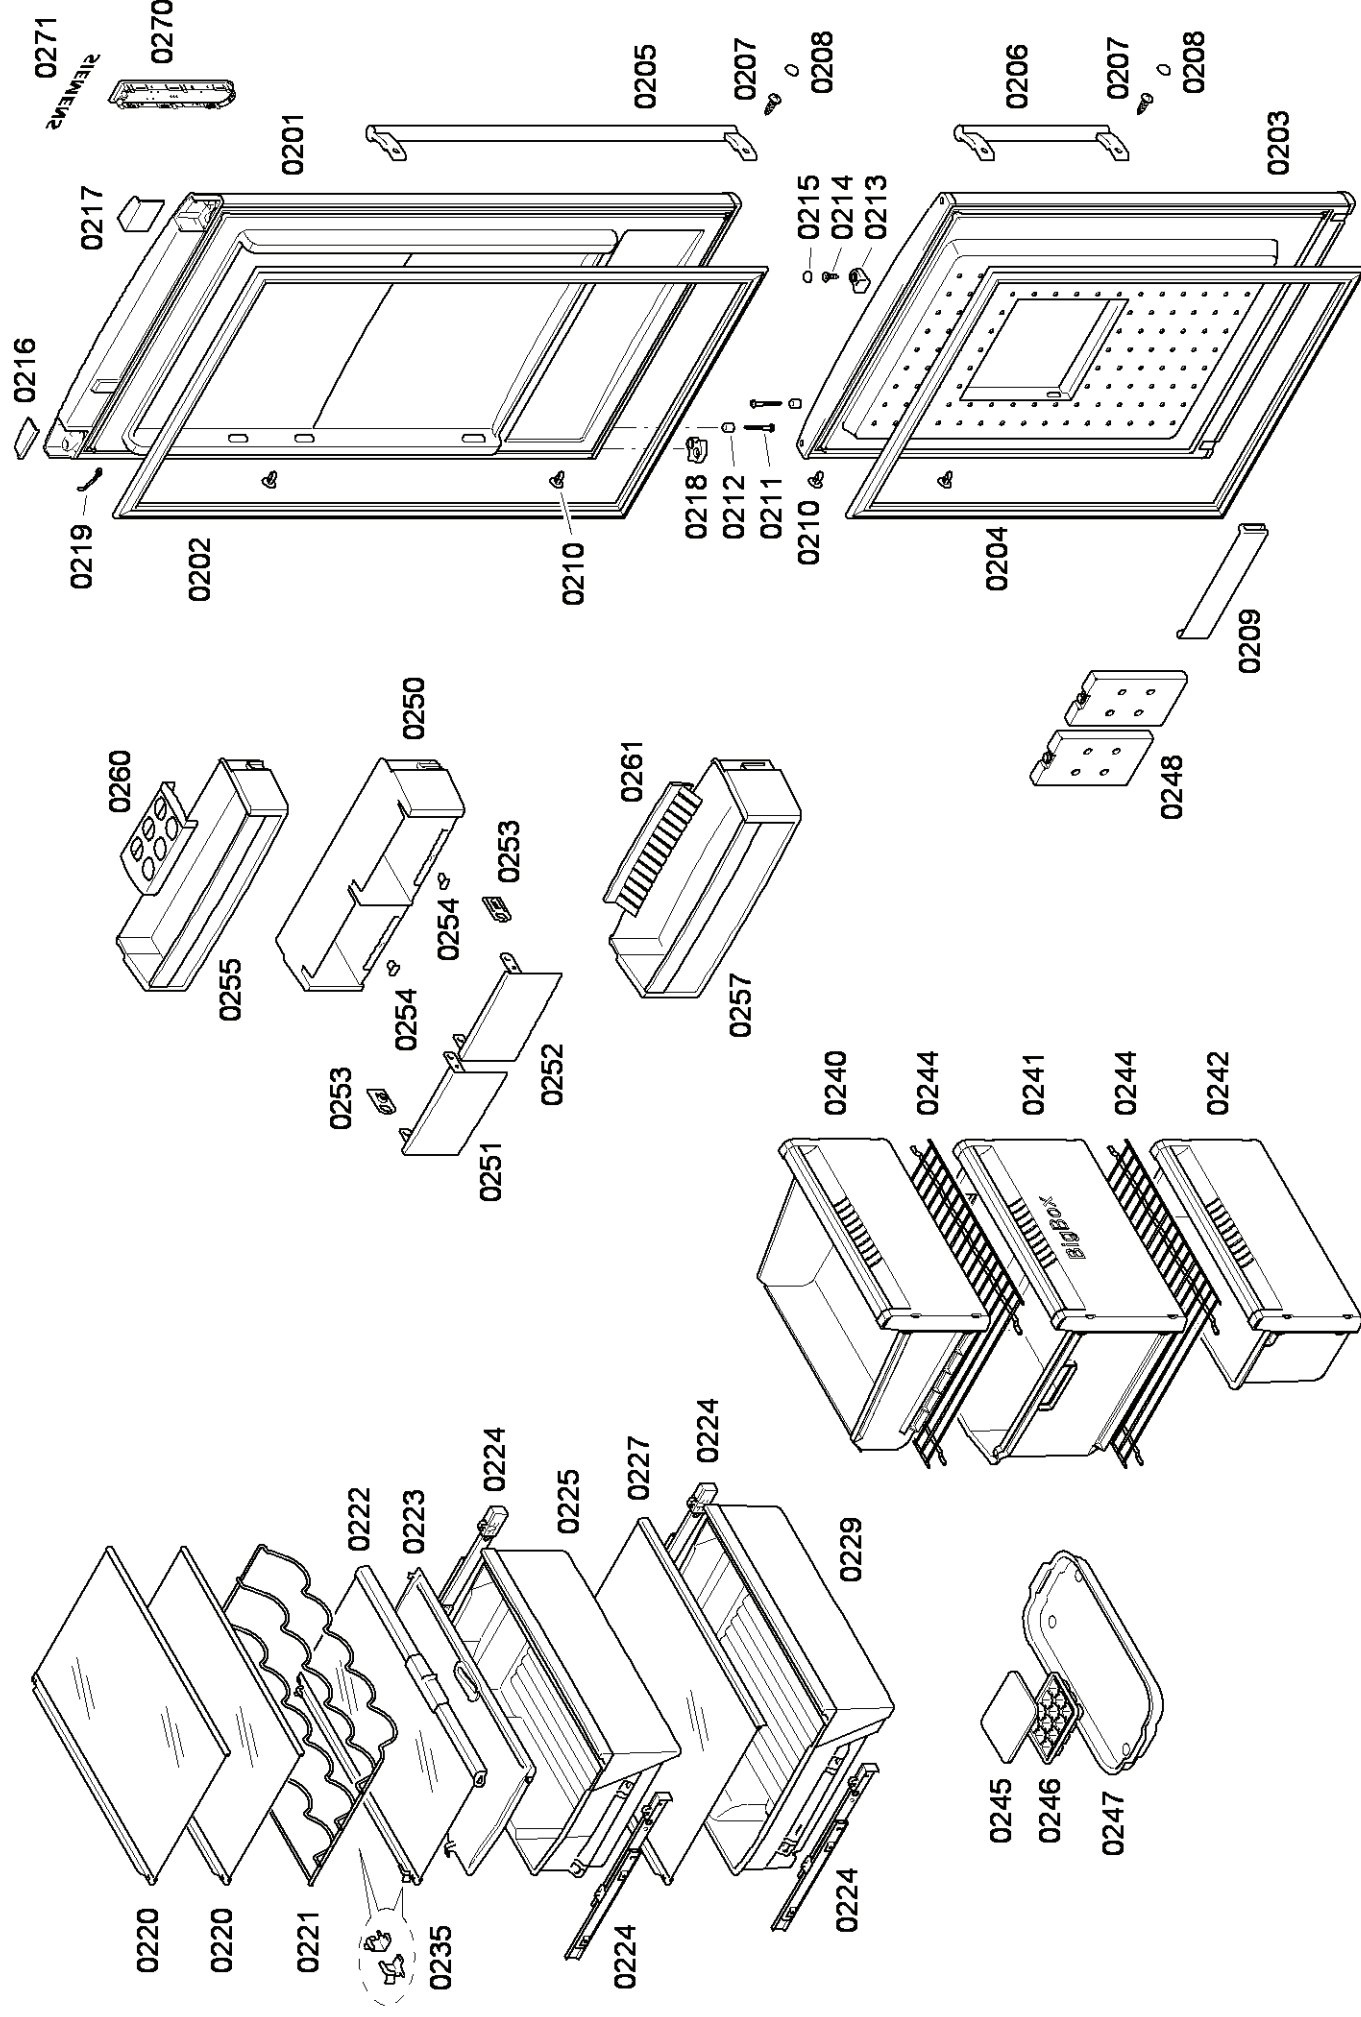

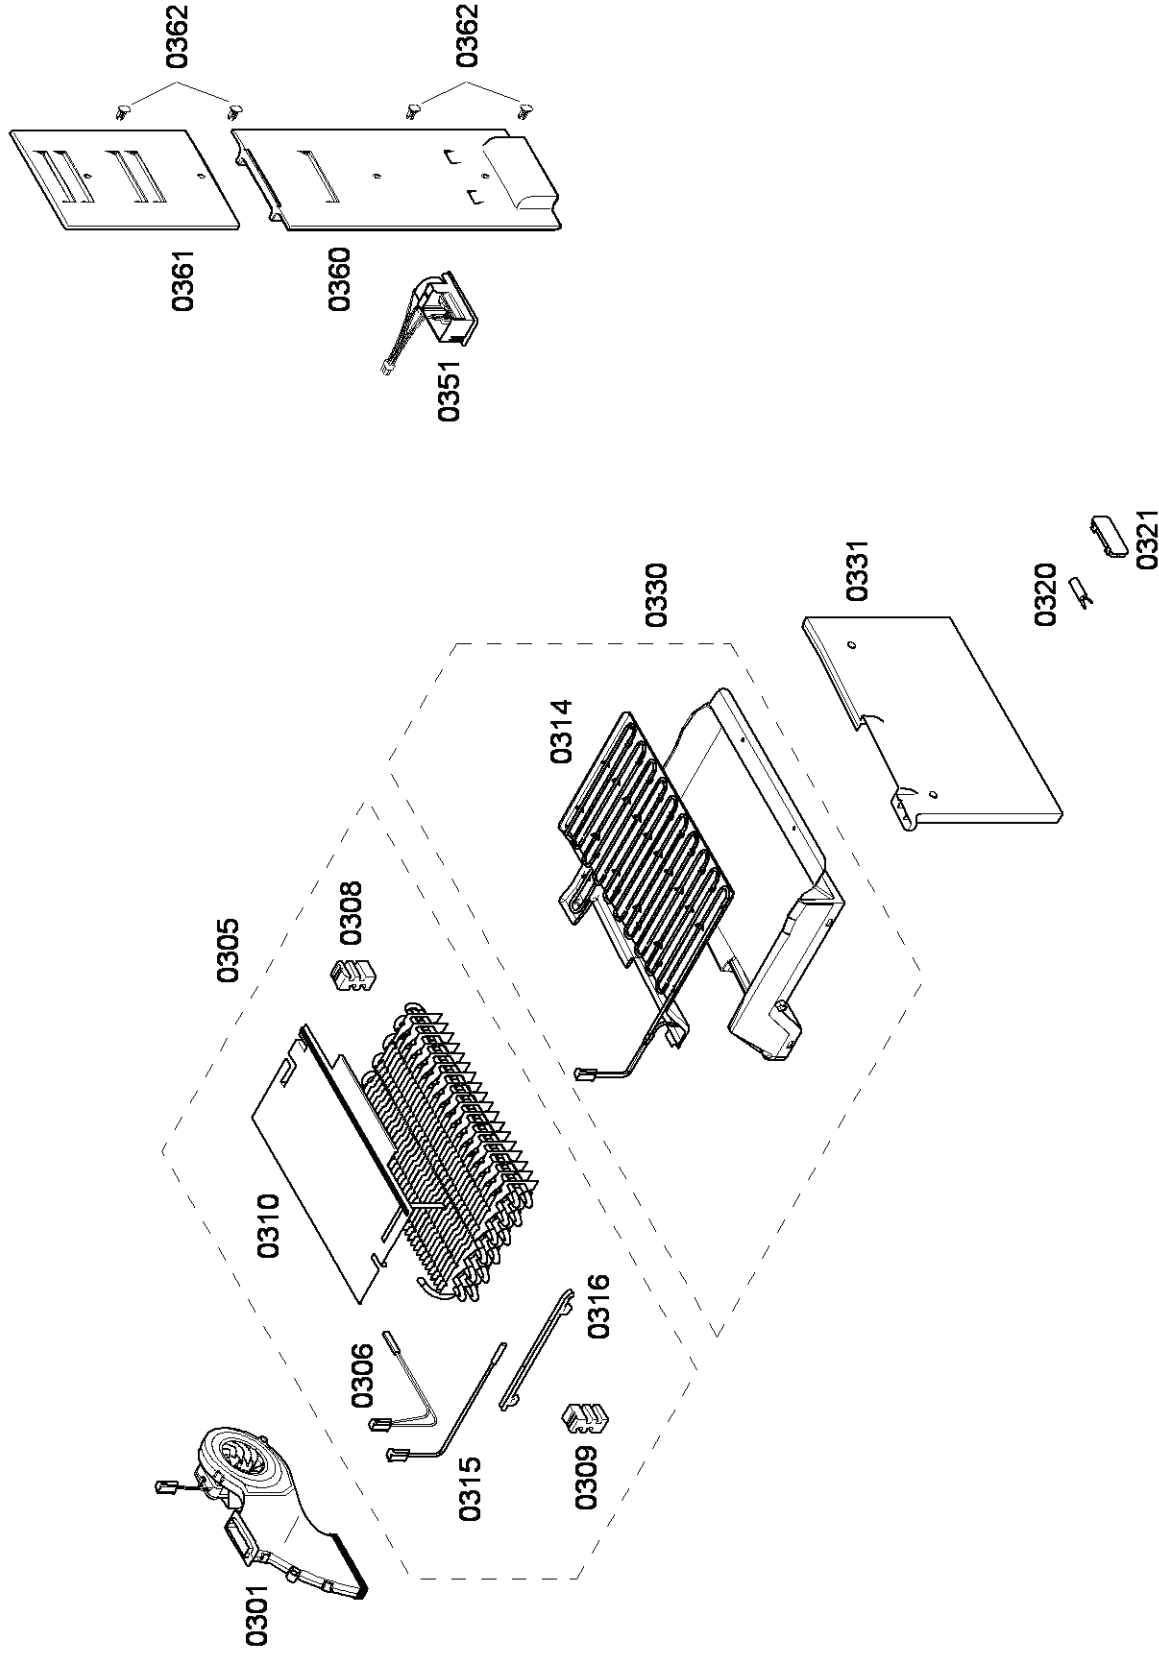

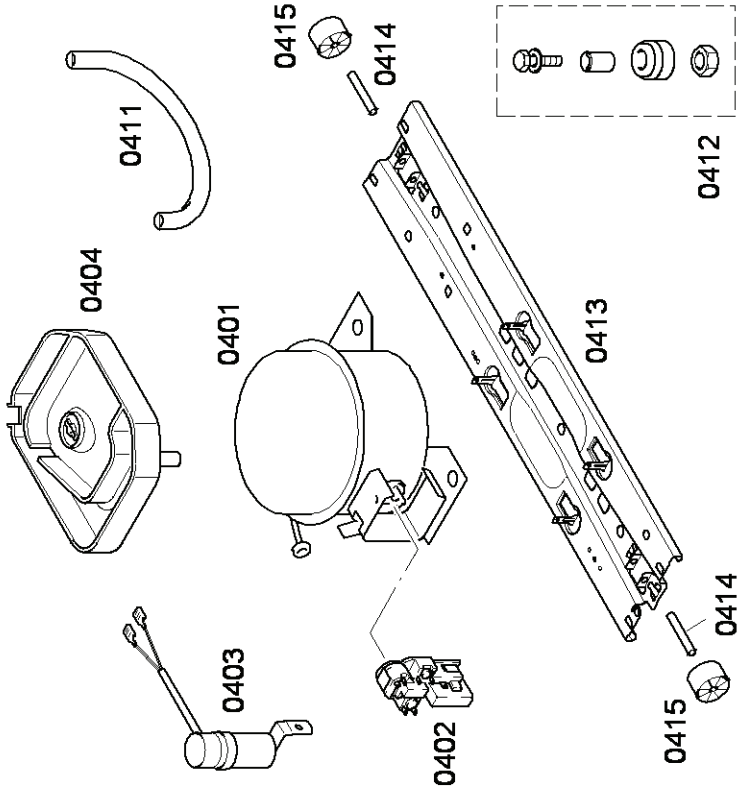

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS									
Test conditions: CECOMAF (evap. temp. -25°C)									
Verdichter/Compressor/Compresor Typ/Type/Tipo Anlaufkondensator/Running capacitor/Condensador de marcha Stromverbrauch/Current consumption/Int. consumo Leistungverbraucht/Power consumption/Potencia cons. C.O.P.		Danfoss NLX10KK.2 YES 0,44 89,50 1,49	Matsushita DG100E NO 0,70 109,00 1,20	Danfoss NLX10KK YES 0,45 96,50 1,36	Danfoss NLX11KK YES 0,51 108,00 1,36	Jiaxispera ZBX1115CY YES 0,48 94,00 1,44			
Kühlleistung/Cooling capacity/Potencia frigorífica	W	133	131	131	147	135			
Füllmenge/Fill. quantity/Charge/Carga	R600a. g	*	*	*	*	*			

* Siehe Typenschild /See identification plate /Voir plaque de caractéristiques /Ver placa de características