




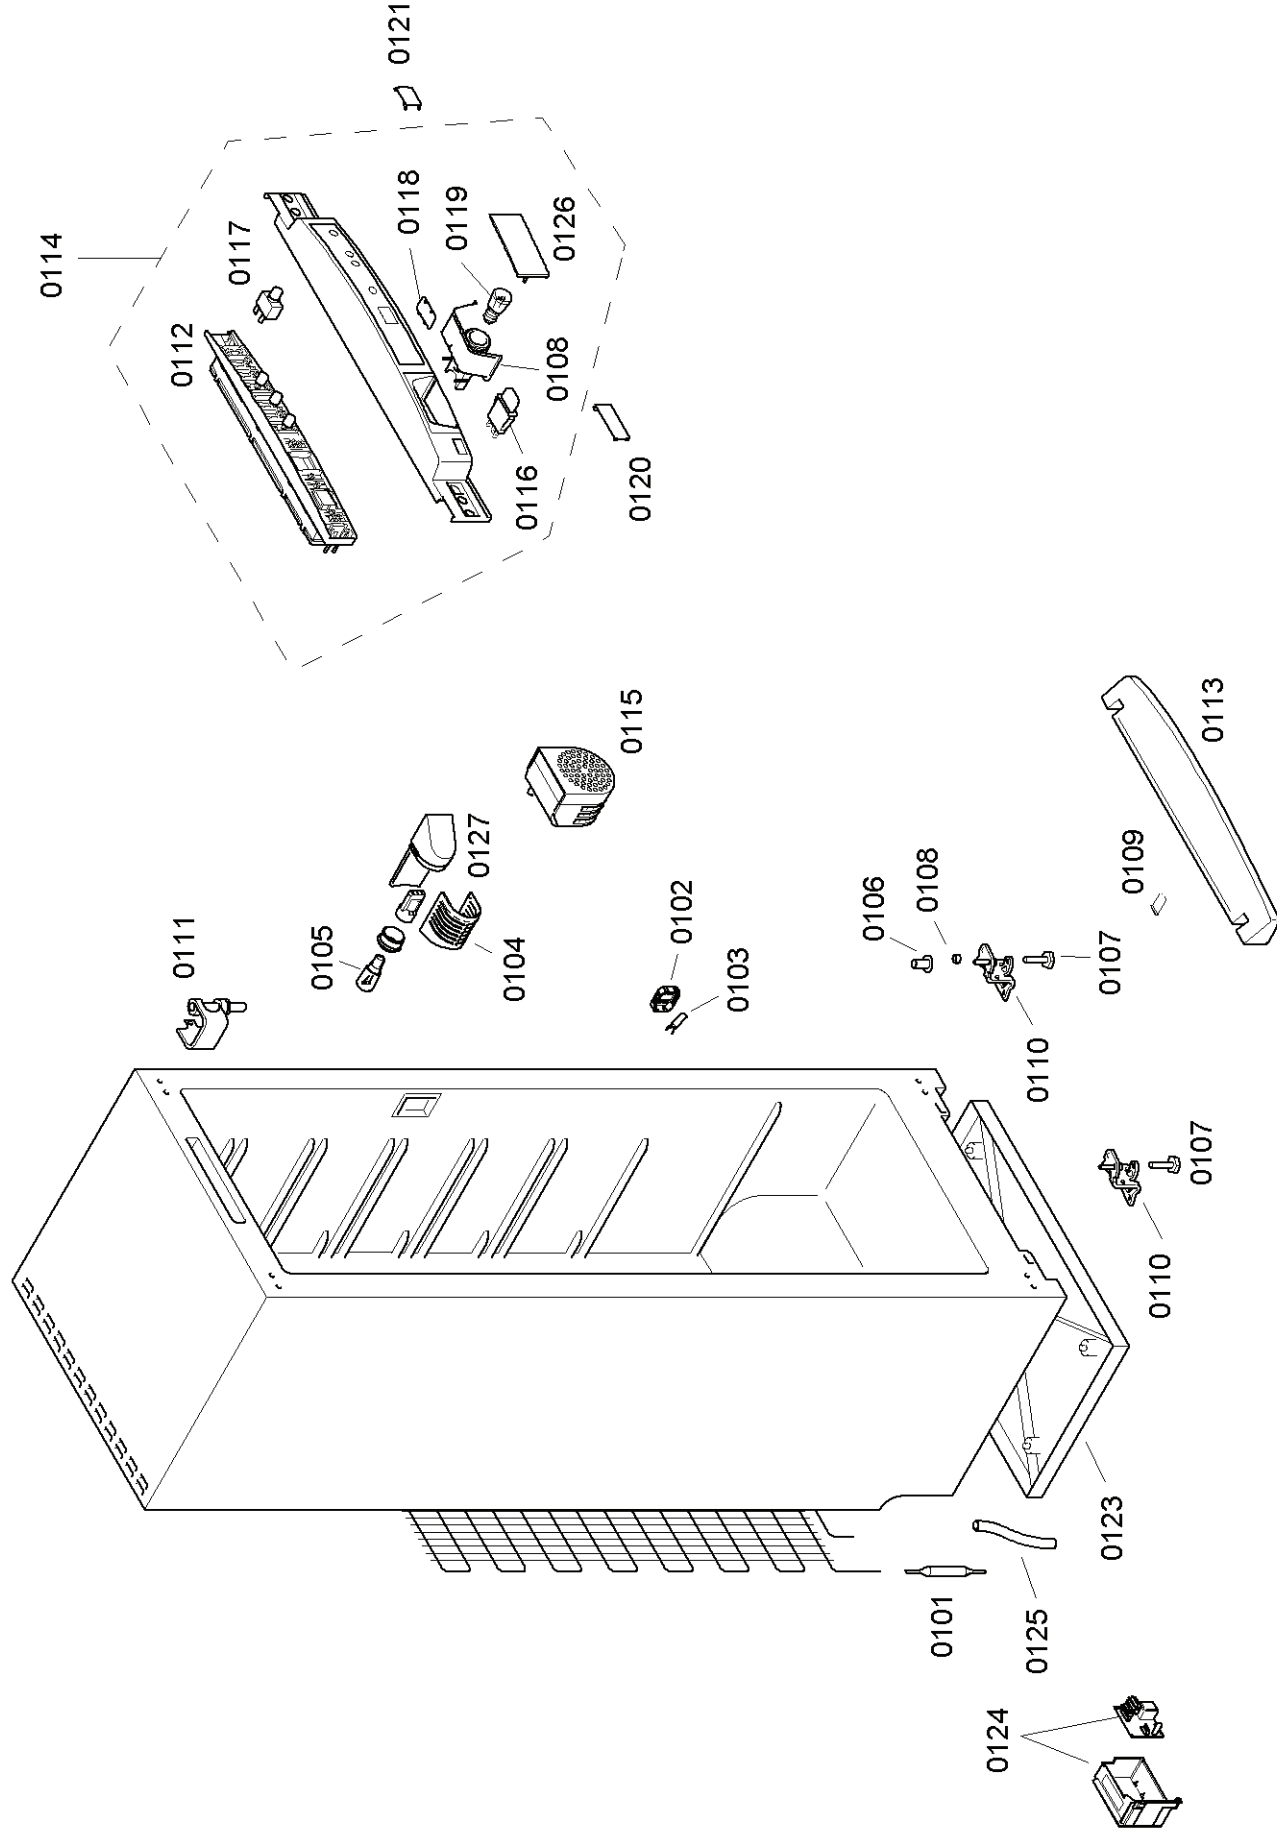

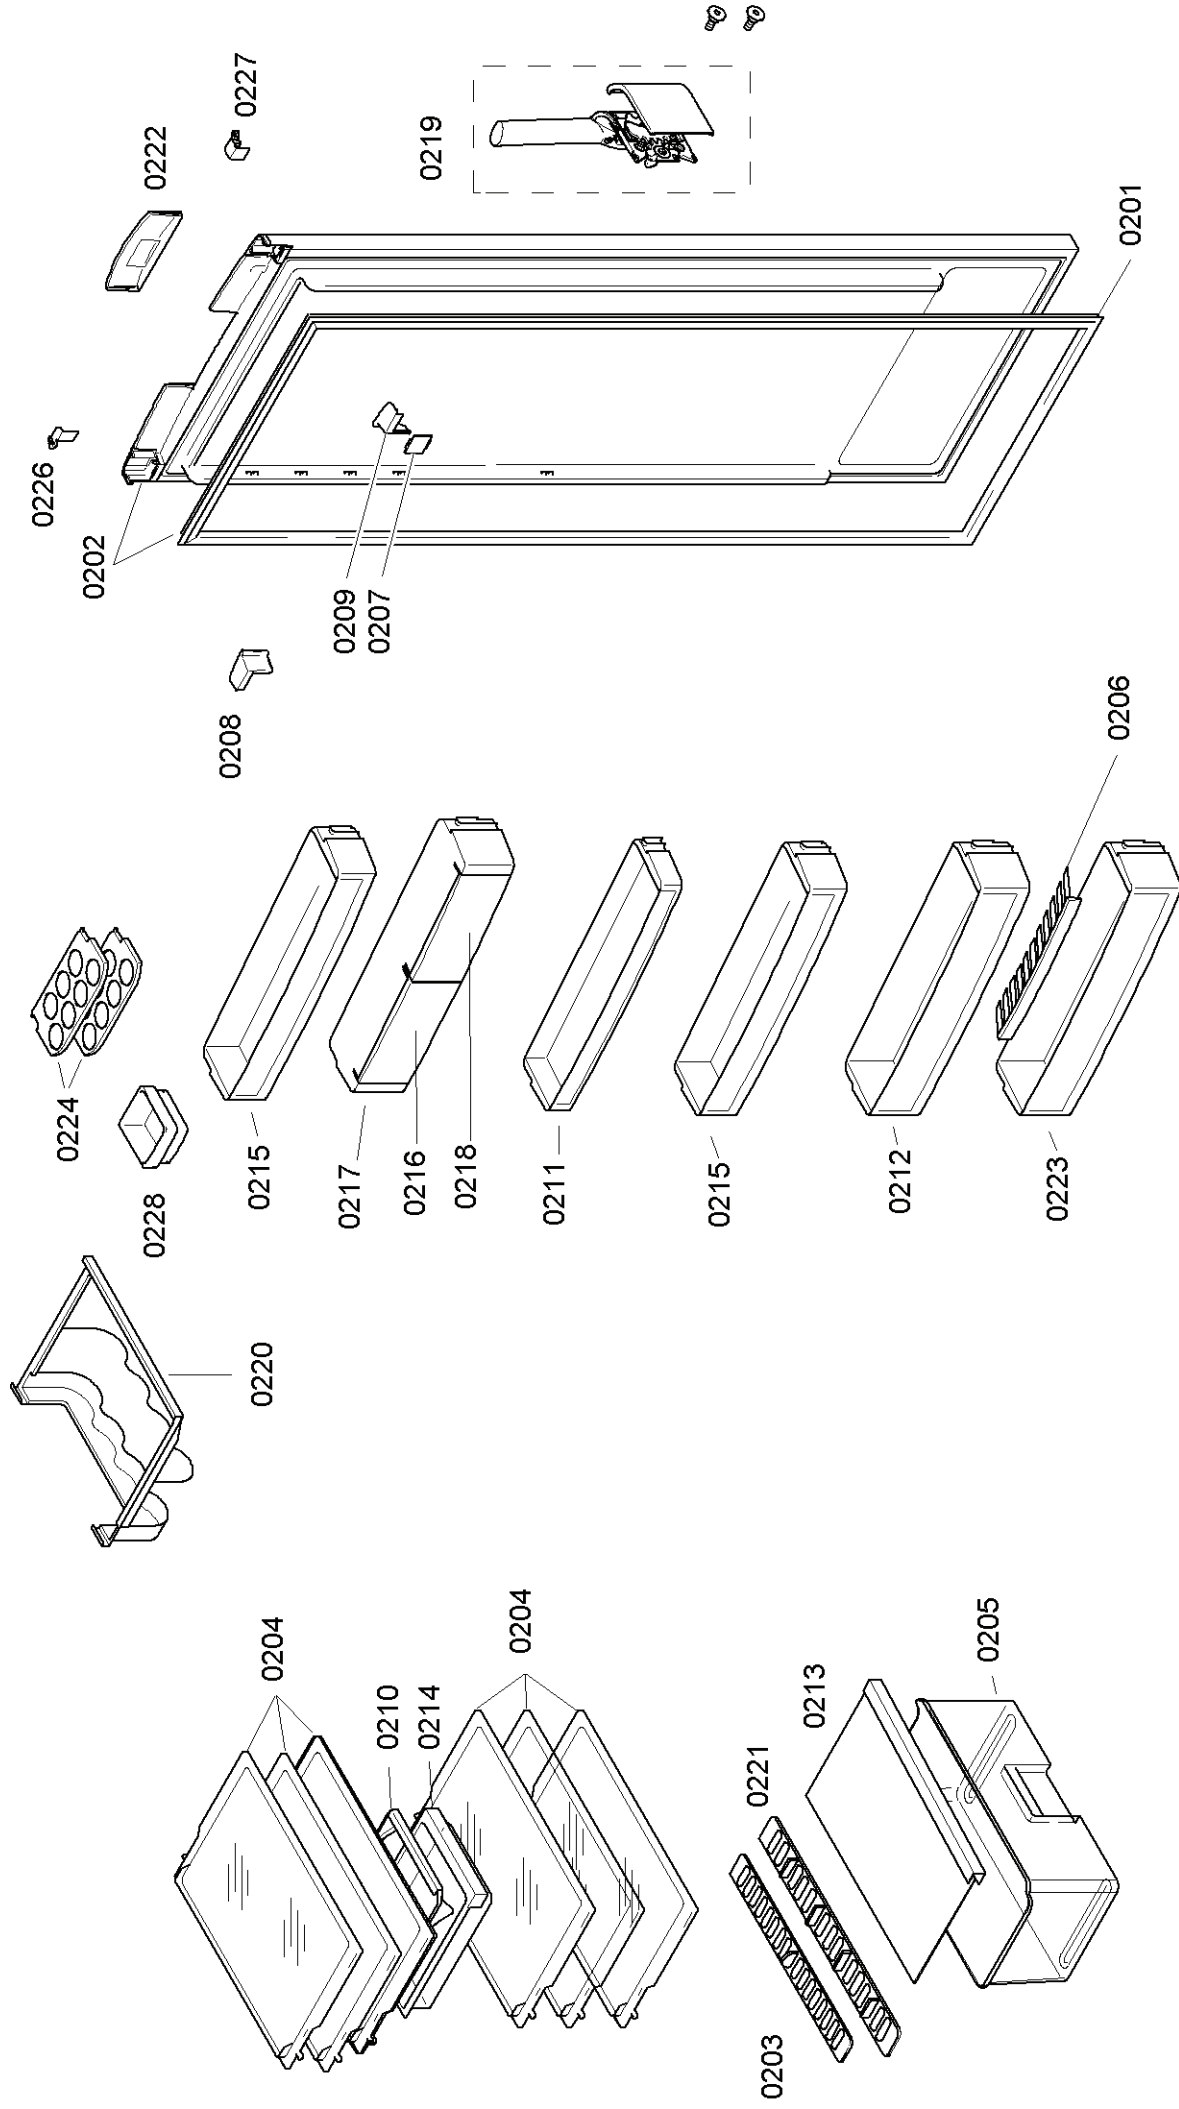

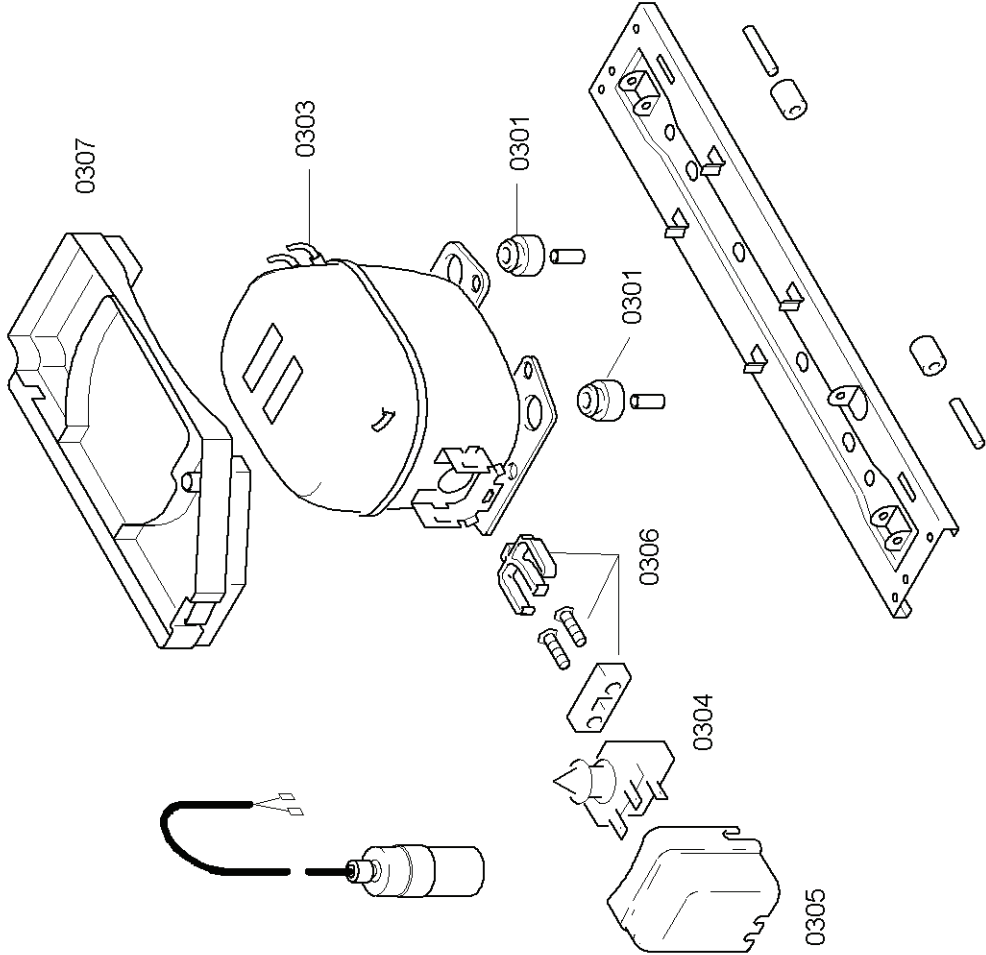

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur Typ/Type Förderleistung/Delivery/Débit Anlaufstrom/Starting current/Cour de démarrage Widerstand/Resistance/Résistance Hi/main/prin Hi/aux	l/h A Ω W	Goldstar NDA69NAEM 0320	
Temp.- Regler/Thermostat Typ/Type Regelstellung/Position Schaltwerte/Switching values Valeurs de commutation			
"warm" "kalt" "alarm"			
Füllmenge/Fill.quantity/Charge	R600a	*	
Anschlußwert/Conn.load/Puiss. connectée	W	67	
Heizung/Heater/Chauffage Widerstand /Resistance/Résistance Leistung/Power/Puissance	Ω W		
Ventilator/Blower/Ventilateur Widerstand /Resistance/Résistance	Ω		
NTC-Fühler / Sensor	° C kΩ	° C kΩ	
	+10 +5 0	±0,18 ±0,18 ±0,16	° C kΩ
			43,31 ±1,10 54,66 ±1,59 69,42 ±2,29
Magnetventil/Magnetic valve/Electrovanne Widerstand/Resistance/Résistance Spannung/Voltage/Tension	W Ω V		

* siehe Typenschild