

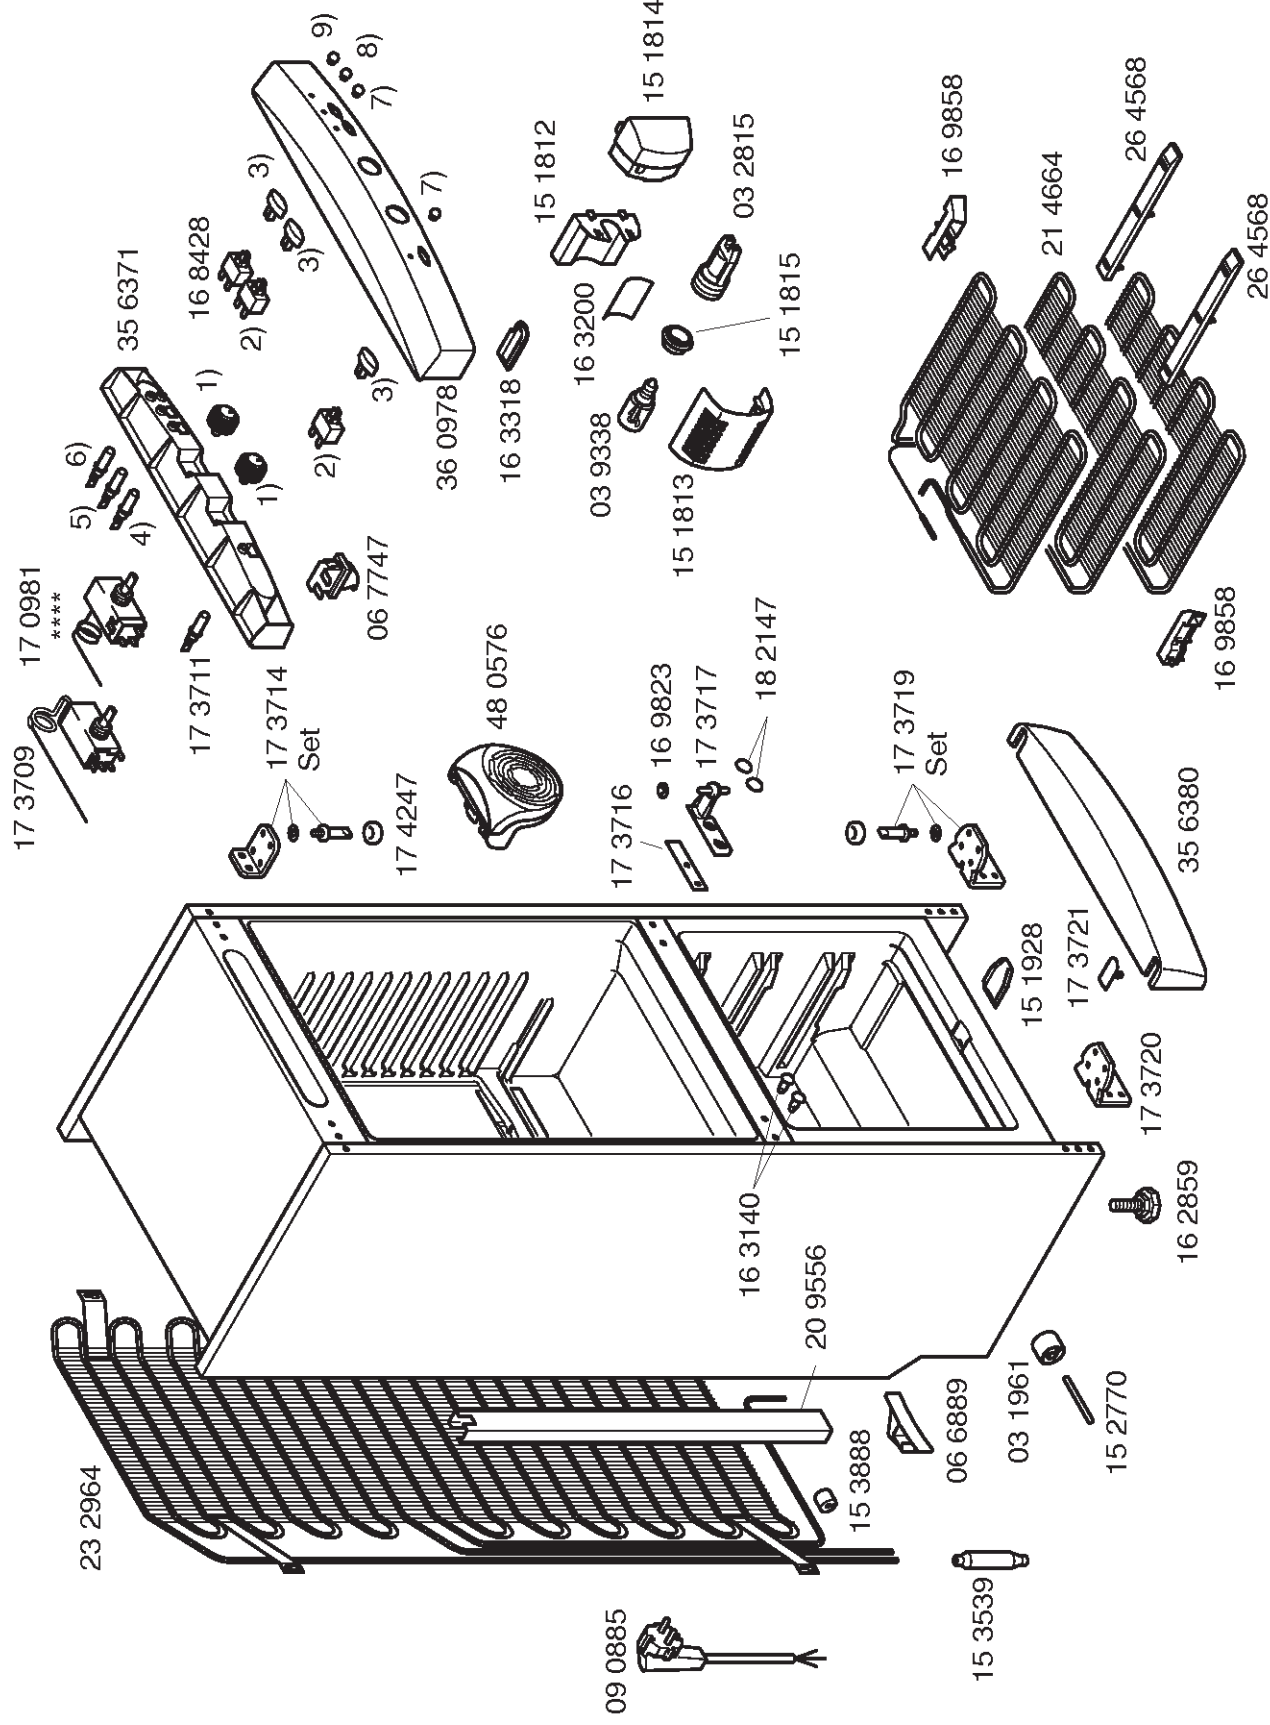
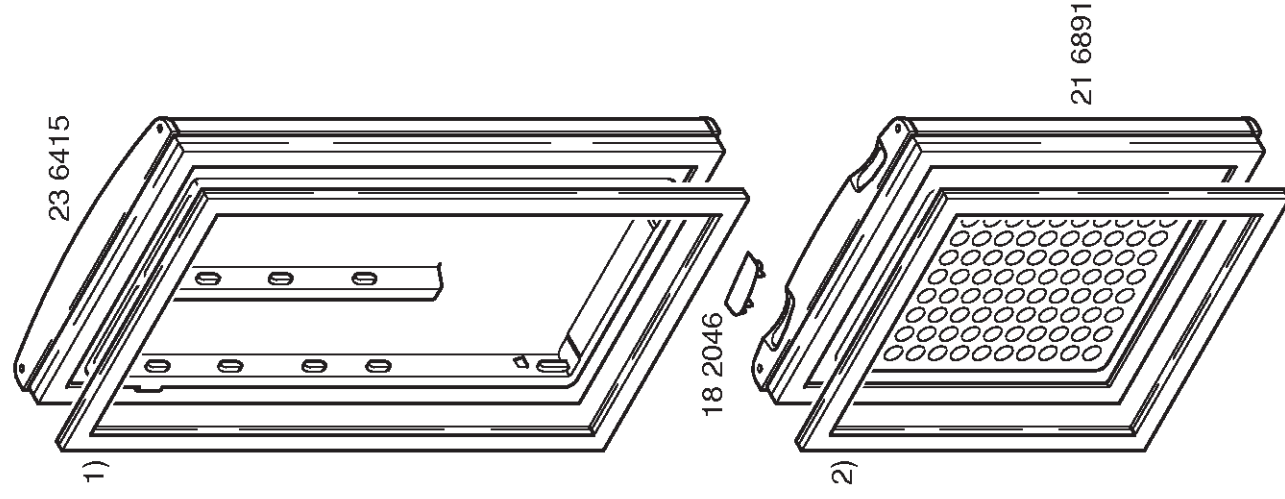


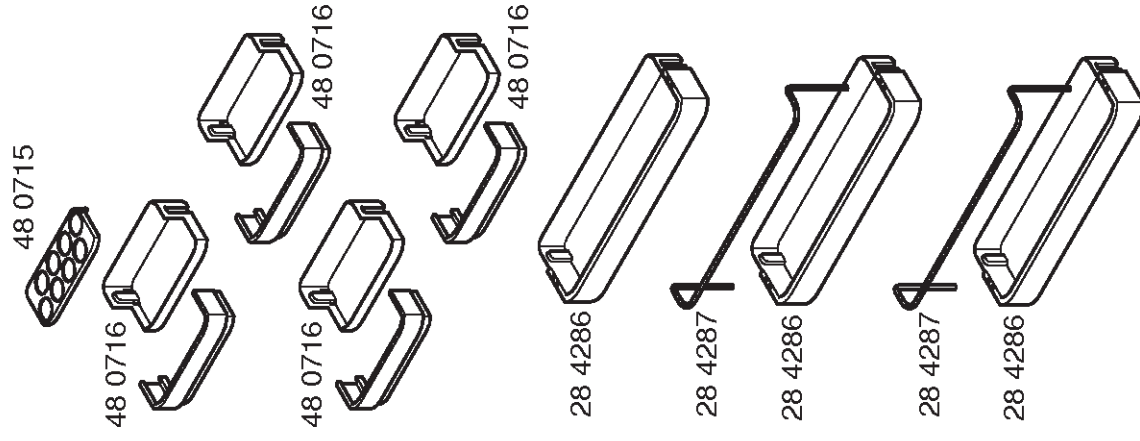

Libro de instrucciones
52 7907
(es.pt)


- 1) 18 2010
- 2) 16 8427
- 3) 18 2020
- 4) 17 3711
- Verde
- 5) 17 3712
- Ambar
- 6) 17 3713
- Rojo
- 7) 18 2011
- Incoloro
- 8) 18 2018
- Ambar
- 9) 18 2019
- Rojo

C 09

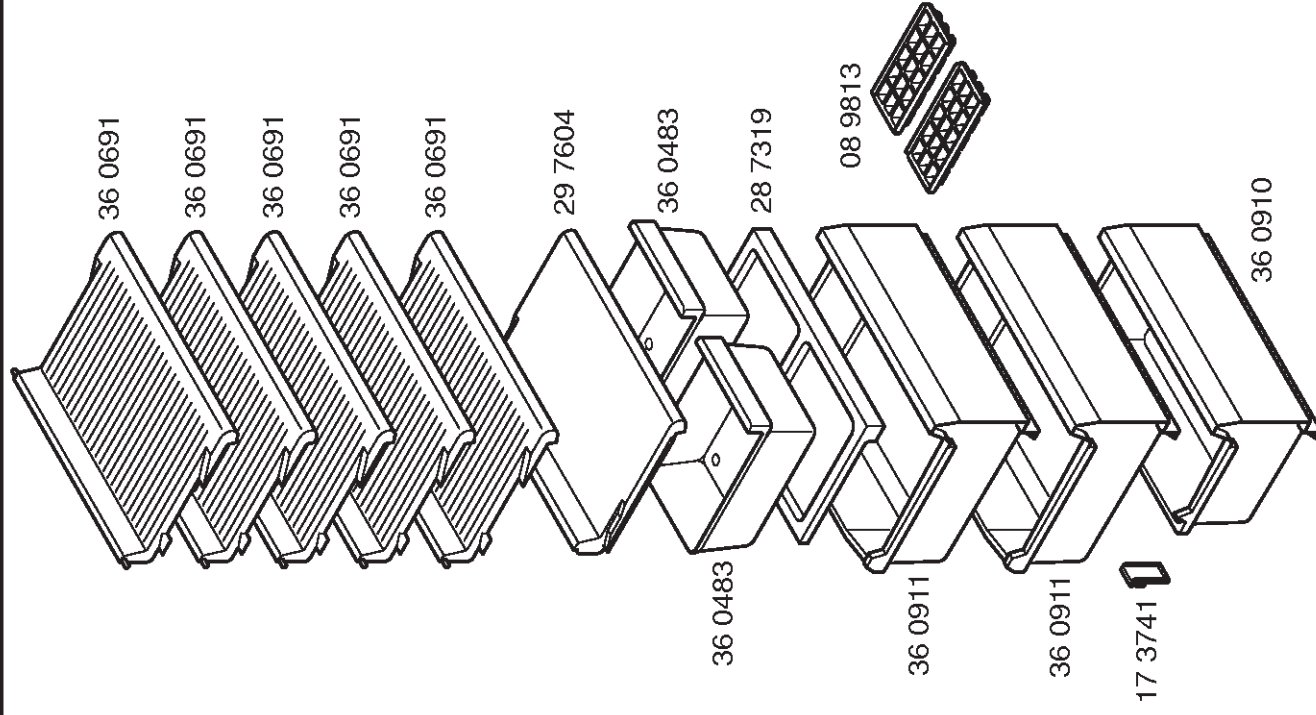

- 1) 21 0432
- 2) 21 0427

IMPORTANTE
Estos burletes sólo se
pueden montar siguiendo
los pasos indicados en el
informe KX50113

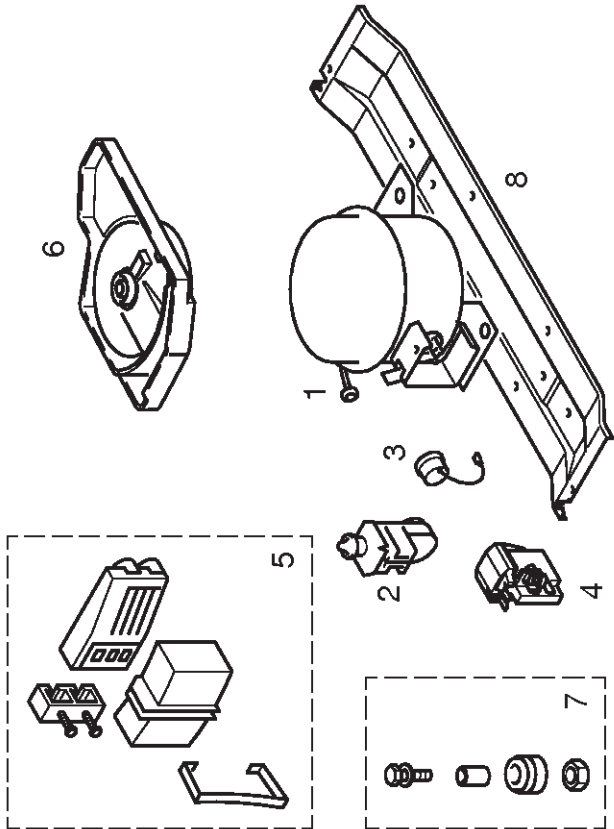

Pos.	****		****	
	Aspera	V01	V02	Aspera
1	BPK1072Y	ND69NAEG	BPK1084Y	
2	14 2000	14 2001	14 2001	
3	15 4315		15 4315	
4	17 3748		16 7769	
5		17 1011		
6	26 4123			
7	05 0166	05 0166	05 0166	
8	28 8253	28 8253	28 8253	
9				
10				
11				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
Verdichter/Compressor/Compresseur/Compresor		****		****
Typ/Type/Typo	Aspera	Gold Star	Aspera	
Förderleistung/Delivery/Debit/Aspiración l/h	BPK1072Y	ND69NAEG	BPK1084Y	
Anlaufstrom/Starting current/Cour. démarrage/Int.arranq. A	0,47		0,52	
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	33,10		29,35	
Hi/aux.	38,20		41,25	
Temp.Reyler/Thermostat/Termostato		Danfoss		Ranco
Typ/Type/Typo	077B6181	MIN. MAX.		K54-L2007
Reglerstellung/Position/Conexión	+6º			MIN. MAX.
Schaltwerte/Switching values/	-11º -28º			-14º -22º
Valeurs de commutation/Desconex.				-20º -28º
(..abtaven' od)				-10º -18º
Füllmenge/Fill. quantily/Charge/Carga R600a	g	*	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potenc.	W	79	83	87
Heizung/Heater/Chauflage/Resistenc.descong.	Ohm			
Widerstand/Resistance/Resistencia	W			
Leistung/Power/Puissance/Potencia				
Ventilator/Blower/Ventilateur/Ventilador	Ohm			
Widerstand/Resistance/Resistencia				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula	Ohm			
Widerstand/Resistance/Resistencia	V			
Spannung/Voltage/Tension/Tensión				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaquette de caractéristiques / Ver plaqueta de características