




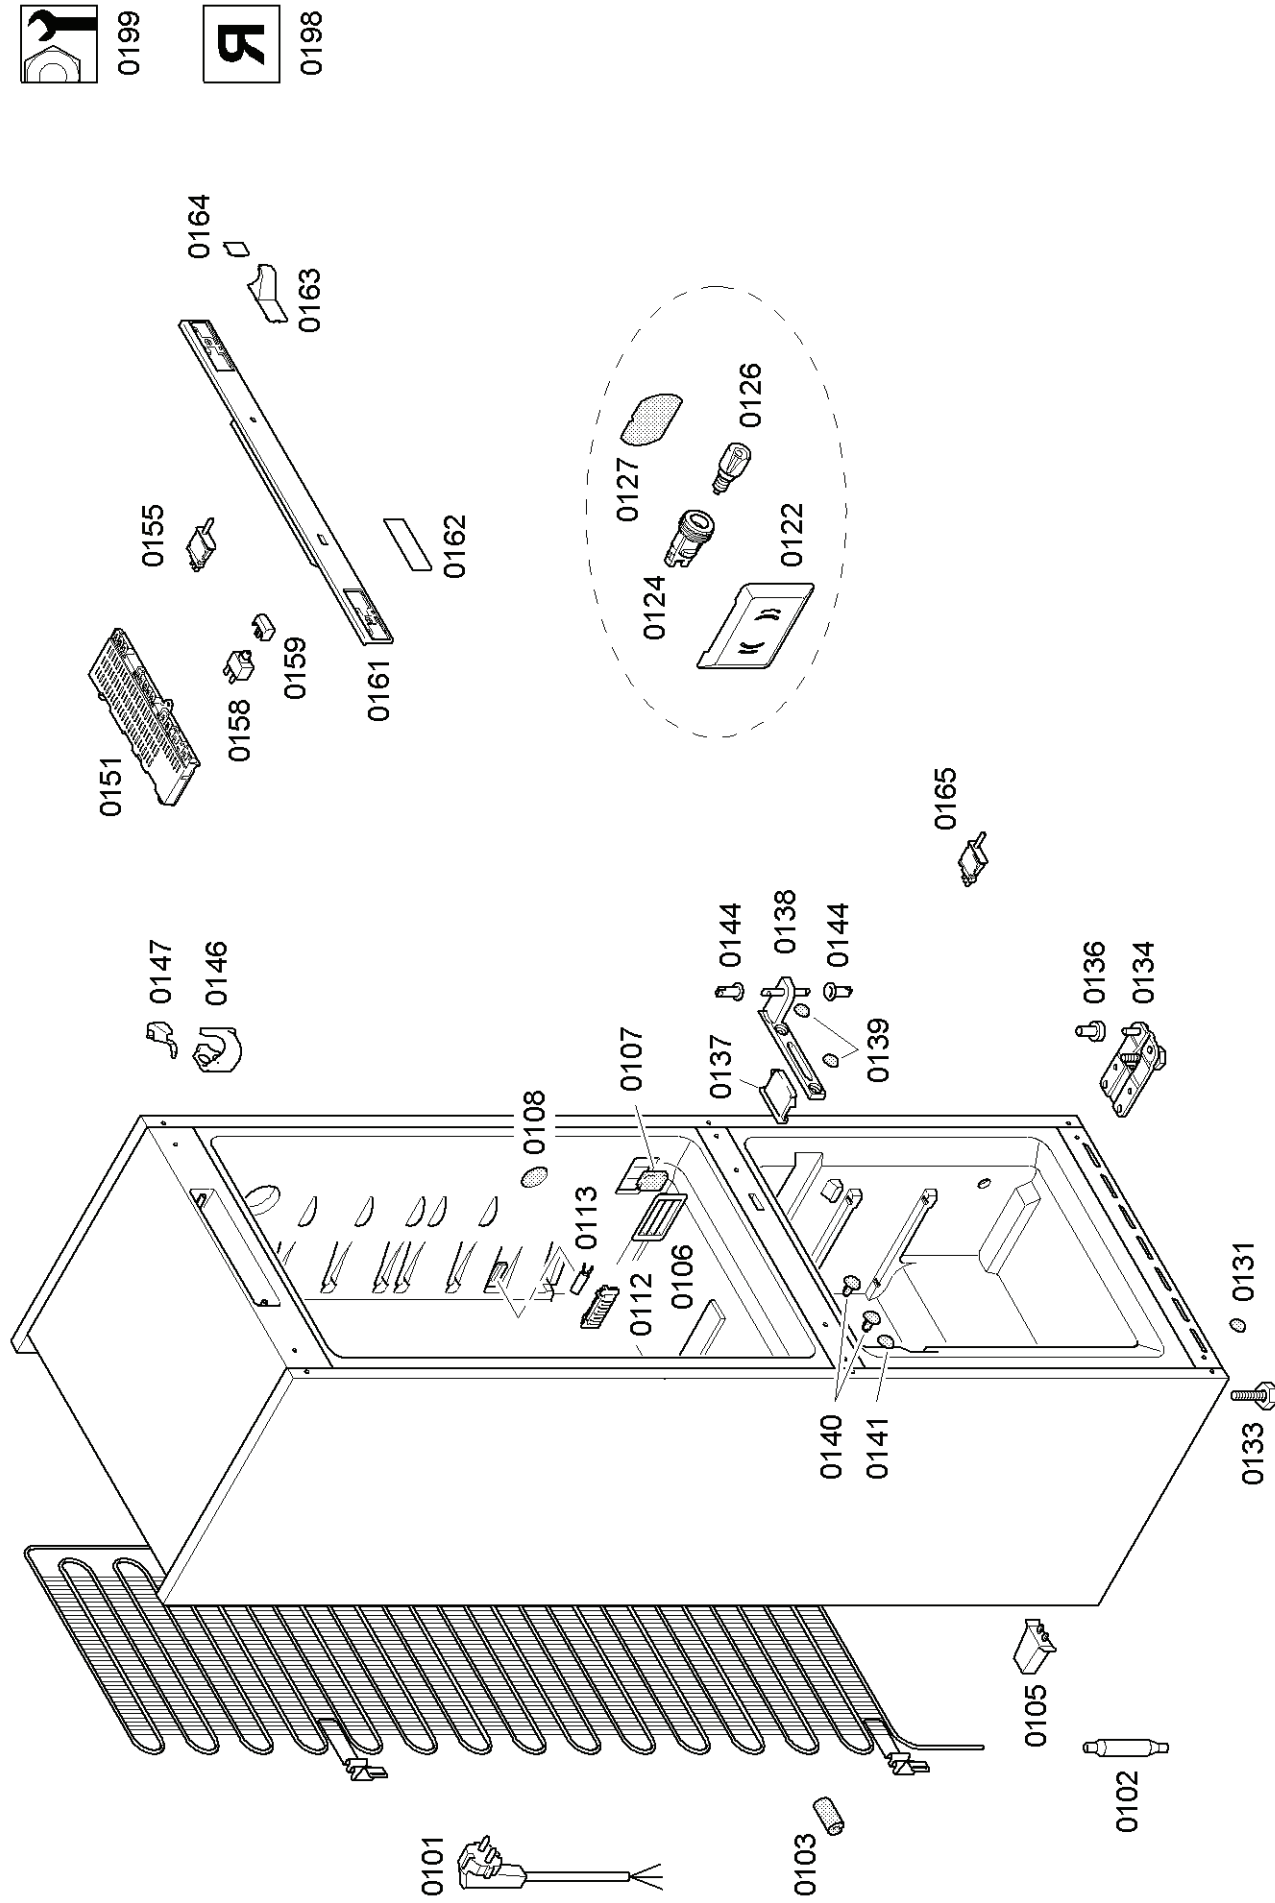


Combis libre instalac.

De libre instalación ≥ 60 cm anchura

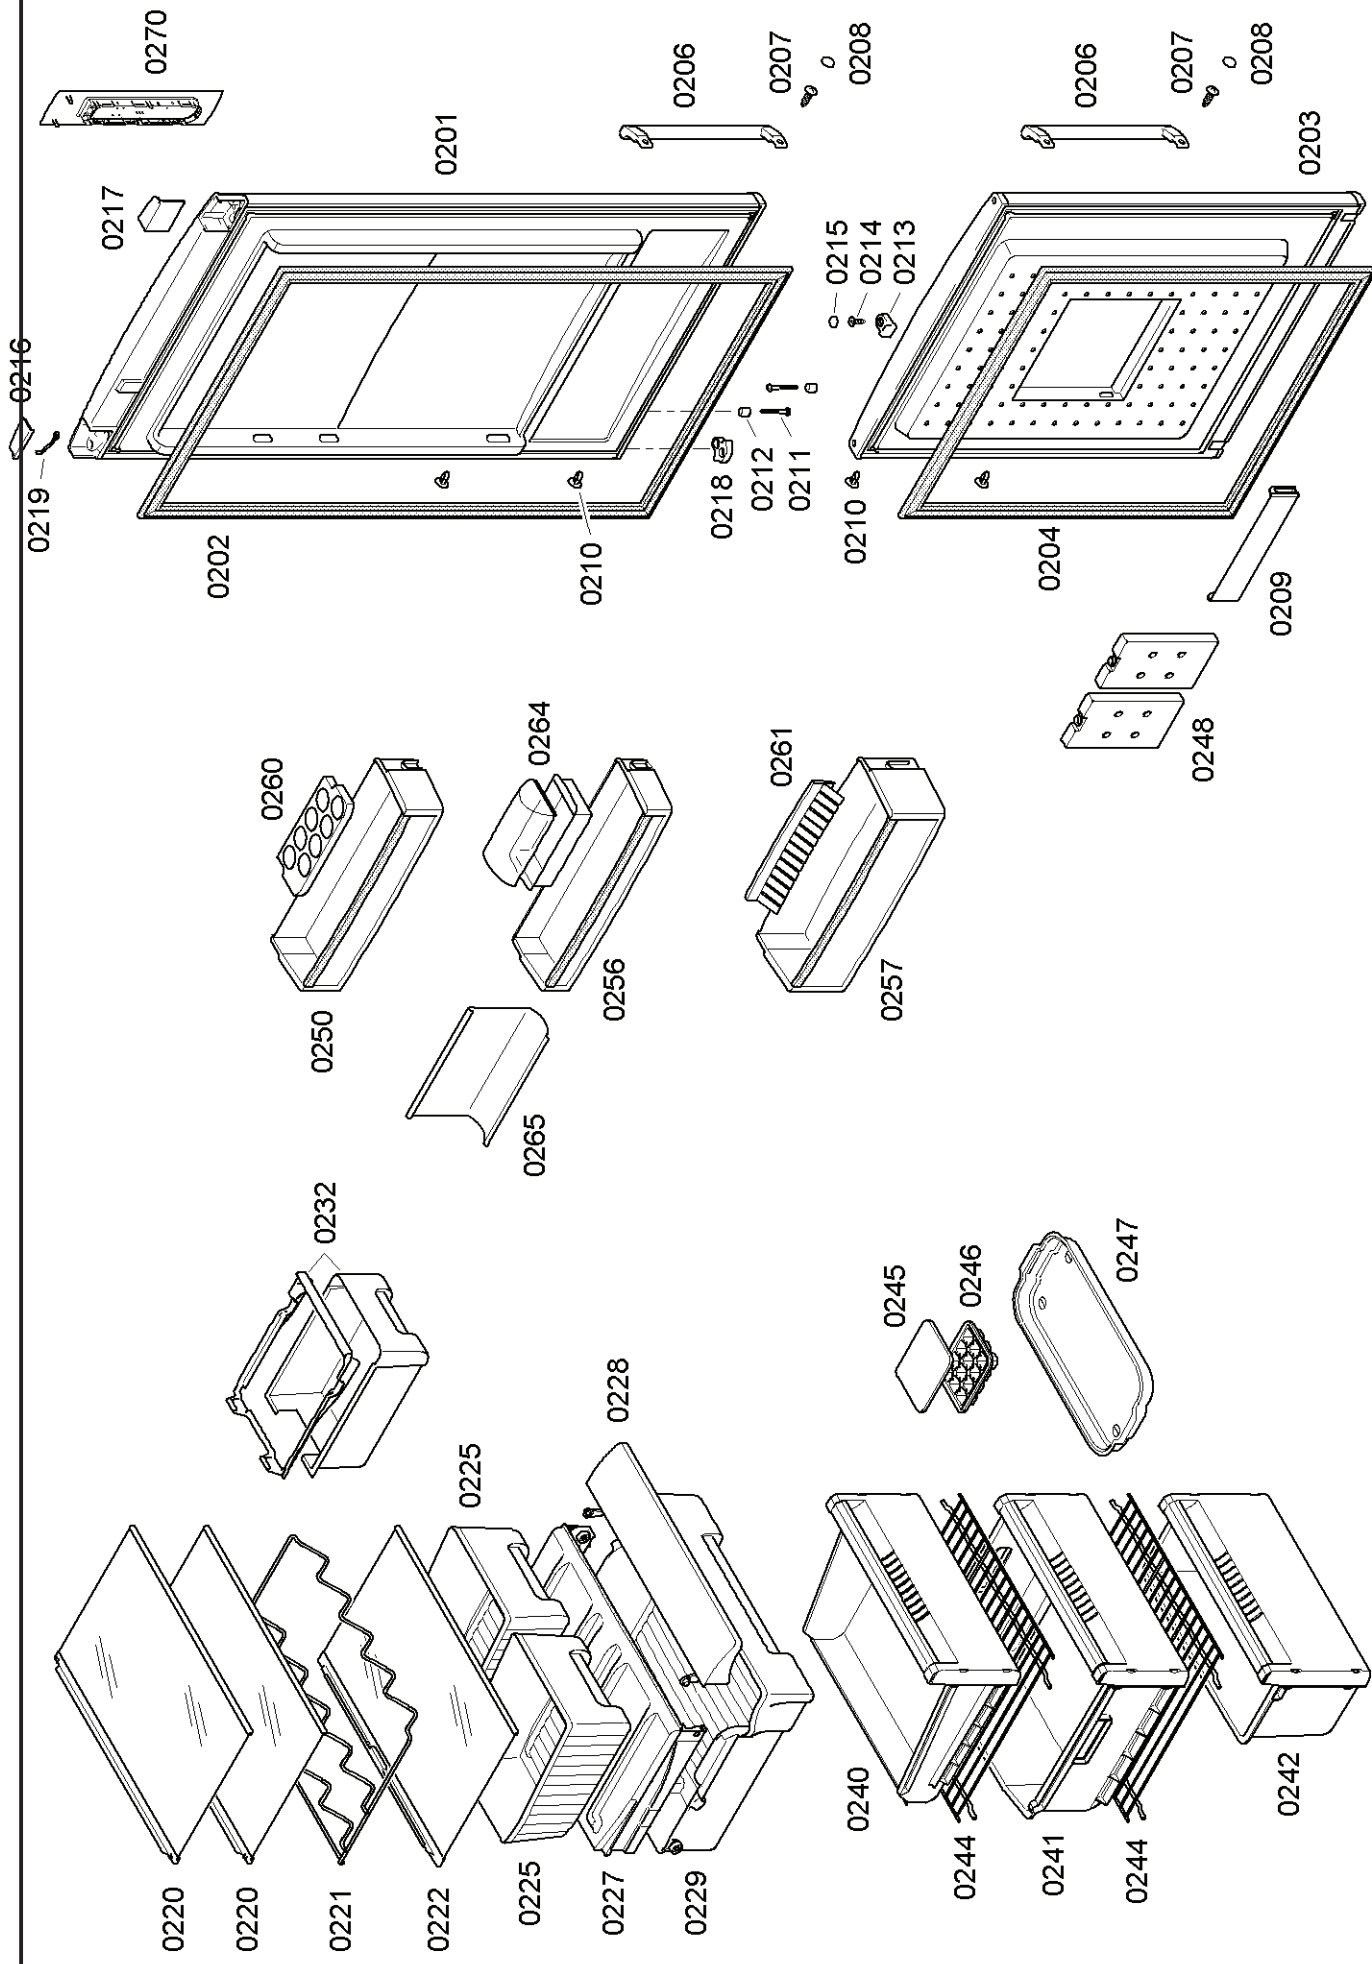

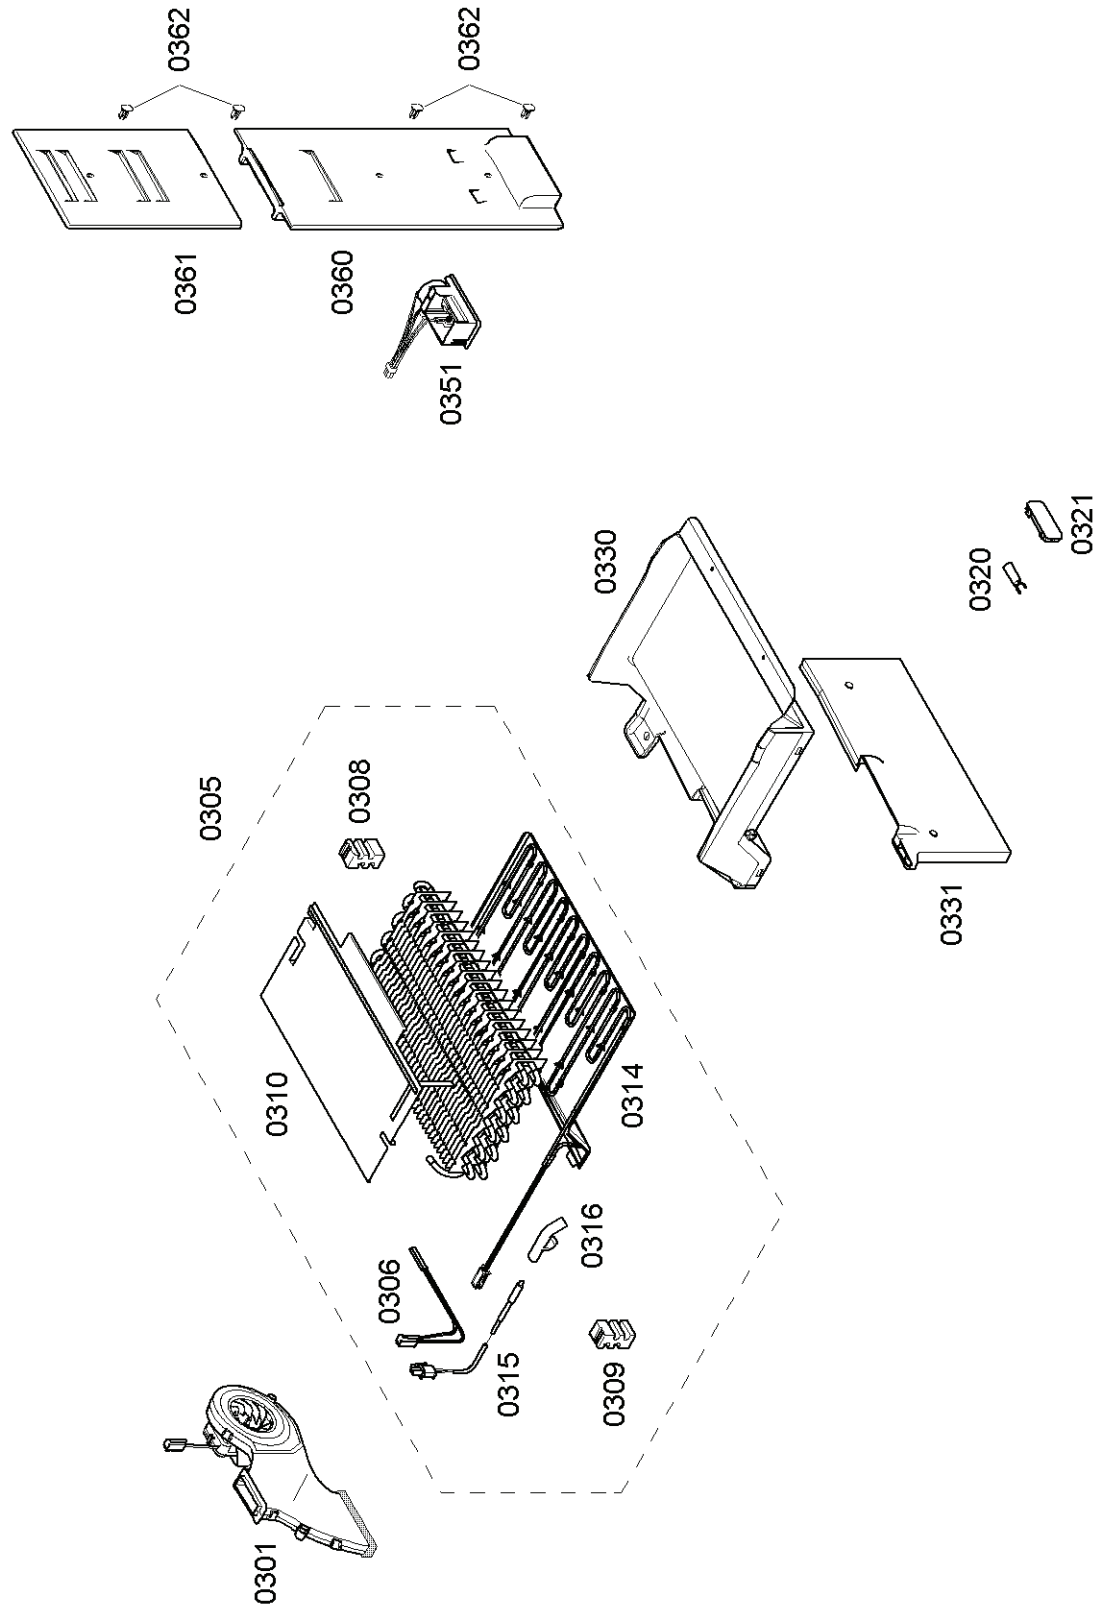

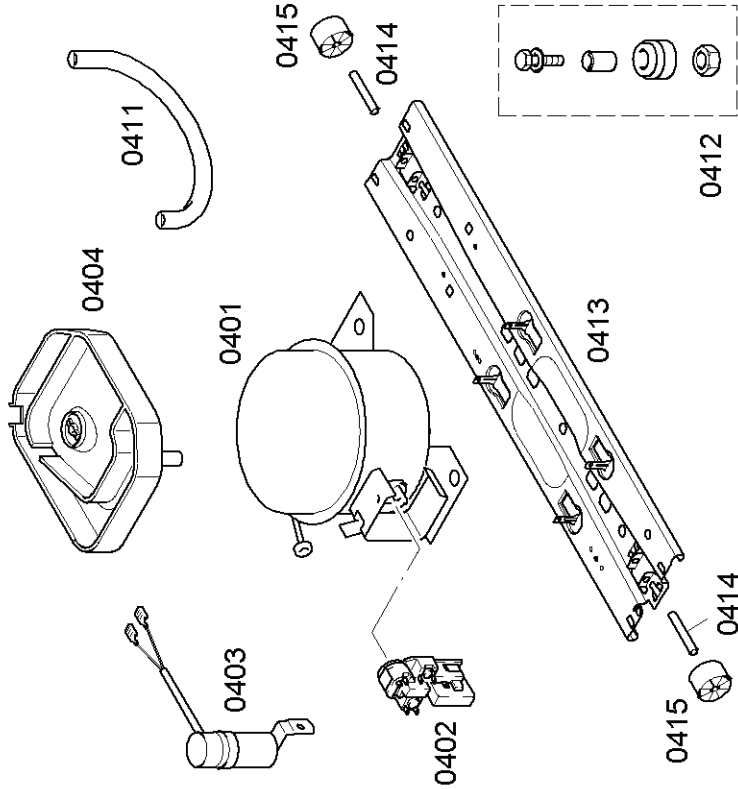

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS									
Test conditions: CECOMAF (evap. temp. -25°C)									
Verdichter/Compressor/Compresor Typ/Type/Tipo	Anlaufkondensator/Running capacitor/Condensador de marcha Stromverbraucht/Current consumption/Int. consumo Leistungverbraucht/Power consumption/Potencia cons. C.O.P. W/W/W	Matsushita DG91E NO 0,64 95,00 1,20	Danfoss NLX8.8KK.2 YES 0,37 76,00 1,49	Matsushita DG100E NO 0,70 109,00 1,20	Danfoss NLX10KK.2 YES 0,44 89,50 1,49	Danfoss NLE11KTK NO 0,95 123,00 1,03			
Kühlleistung/Cooling capacity/Potencia frigorífica		114	113	131	133	127			
Füllmenge/Fill. quantity/Charge/Carga		*	*	*	*	*			

* Siehe Typenschild /See identification plate /Voir plaque de caractéristiques /Ver placa de características