



Philips Domestic Appliances and Personal Care

Service Manual

PRODUCT INFORMATION

HR 1730 = 3-speed blender

HR 1734 = HR 1730 + HR 2938

Motor power	: 400 W
Voltage	: 220-240 V / 50-60 Hz : 110-127 V / 50-60 Hz
Speeds	: 3 speed + pulse
Blender jar capacity	: 1.5 l effective
Dimensions product	: 339 x 199 x 236 mm

Accessoires : **HR 2938** = Soybean / Fruit filter
HR 2939 = Chopper
 Capacity bowl : 200 ml effective
HR 2940 = Multi mill
 Capacity cup : 400 ml effective
HR 2941 = Glass jar

SERVICE INFORMATION

Inspection after repair:

Test the safety interrupter item 3 by mounting and dismounting an accessory while the appliance is switched on.

/CB is in Cucina colour


This product meets the requirements regarding interference suppression on radio and TV.

After the product has been repaired, it should function properly and has to meet the safety requirements as officially laid down at this moment.

1	4206 133 91560	Panel	Cucina
2	4206 136 50450	Drive coupling	Cucina
3	4206 136 48600	Safety switch	
4	4206 133 91530	Housing	Cucina
5	4206 136 50410	3-Speed switch	Cucina
6	4822 321 10364	Flex (standard)	
7	4206 133 53190	Motor cushion	
8	4206 136 46700	Motor 110-127 V	
	4206 136 46780	Motor 220-240 V	
9	4206 133 91570	Bottom	Cucina
10	4221 047 45430	Stud	
11	4206 133 90410	Stopper	
12	4206 133 91580	Lid	Cucina
13	4206 133 90390	Jar	
14	4206 133 53430	Sealing ring	
15	4206 136 50420	Interface / Knife unit	Cucina

30	4206 136 48990	Soybean / Fruit filter
DFU	4222 002 30850	UK/FR/DE/NL/ES/PT/IT/GR
DFU	4222 002 30170	UK/DE/DAN/SWED/NOR/ FINN/GR
DFU	4222 002 30190	UK/ARAB/S-CH/T-CH/Korean
DFU	4222 002 31120	UK/Russian/Polish/Estonian/ Latvian/Lithuanian
DFU	4222 002 31070	UK/S-CH/T-CH/Korean

with RIS and circuit breaker

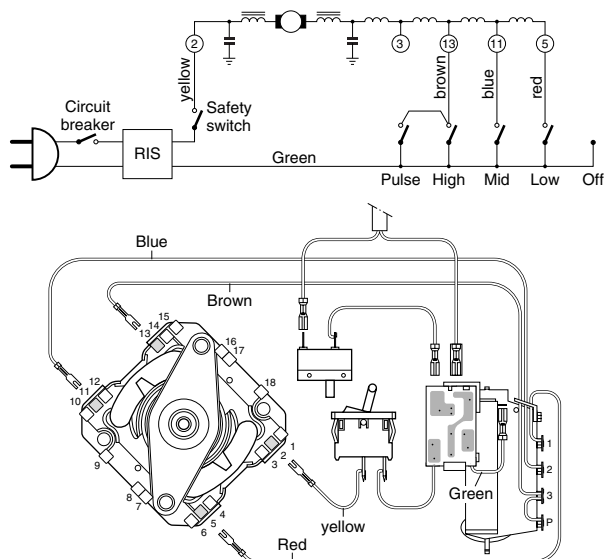

Circuit breaker 5A	(110-127 V)	= 4206 136 49510
Circuit breaker 2,5A	(220-240 V)	= 4206 136 49520

RIS = radio interference suppressor.

