



Philips Domestic Appliances and Personal Care

Service Manual

PRODUCT INFORMATION

HR 1750 = 3-speed blender

HR 1757 = HR 1750 + HR 2938 + HR 2940

Motor power	: 500 W
Voltage	: 220-240 V / 50-60 Hz
	: 110-127 V / 50-60 Hz
Speeds	: 3 speed + pulse
Blender jar capacity	: 1.5 l effective
Dimensions product	: 390 x 180 x 230 mm

Accessoires : **HR 2938** = Soybean / Fruit filter

HR 2939 = Chopper
Capacity bowl : 200 ml effective

HR 2940 = Multi mill
Capacity cup : 400 ml effective

HR 2941 = Glass jar

SERVICE INFORMATION

Inspection after repair:

Test the safety interrupter item 3 by mounting and dismounting an accessory while the appliance is switched on.

/AB is in Cucina colour

This product meets the requirements regarding interference suppression on radio and TV.

After the product has been repaired, it should function properly and has to meet the safety requirements as officially laid down at this moment.

HR 1750/AB

1	4206 133 91560	Panel	Cucina
2	4206 136 50450	Drive coupling	Cucina
3	4206 136 48600	Safety switch	
4	4206 133 91530	Housing	Cucina
5	4206 136 50410	3-Speed switch	Cucina
6	4822 321 10364	Flex (standard)	
7	4206 133 53190	Motor cushion	
8	4206 136 46700	Motor 110-127 V	
	4206 136 46780	Motor 220-240 V	
9	4206 133 91570	Bottom	Cucina
10	4221 047 45430	Stud	
11	4206 133 93700	Safety lid	
12	4206 133 93710	Jar lid	Cucina
13	4206 136 52380	Jar assy	

HR 2940


20	4206 136 50440	Cover	Cucina
21	4206 133 90260	Cup	
22	4206 133 53410	Sealing ring	
23	4206 136 49440	Interface / Knife unit	

HR 2938


30	4206 136 48990	Soybean / Fruit filter	
----	----------------	------------------------	--

Depends of the version the electrical diagram is:



with RIS and circuit breaker

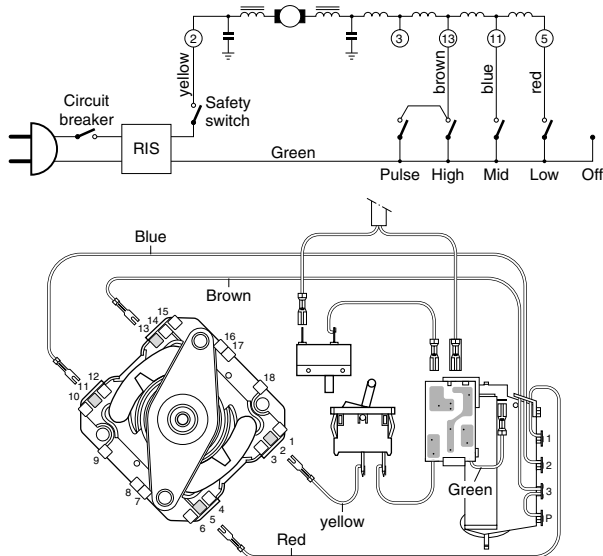

with circuit breaker

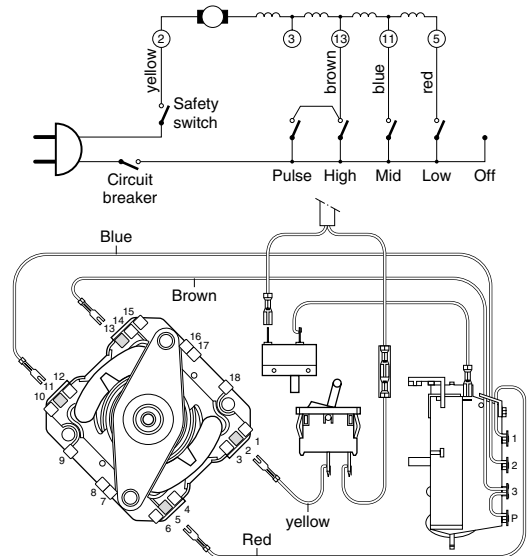

with RIS

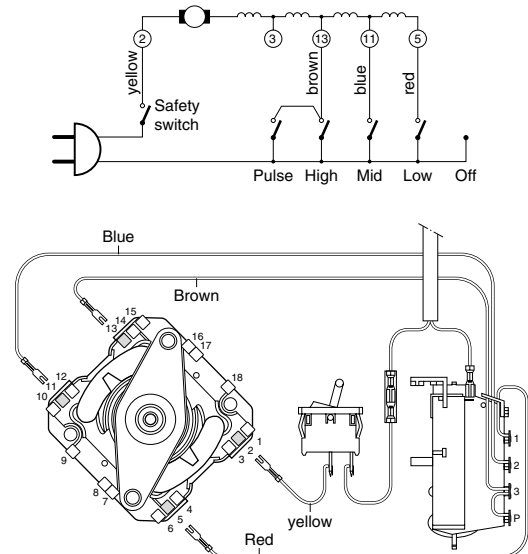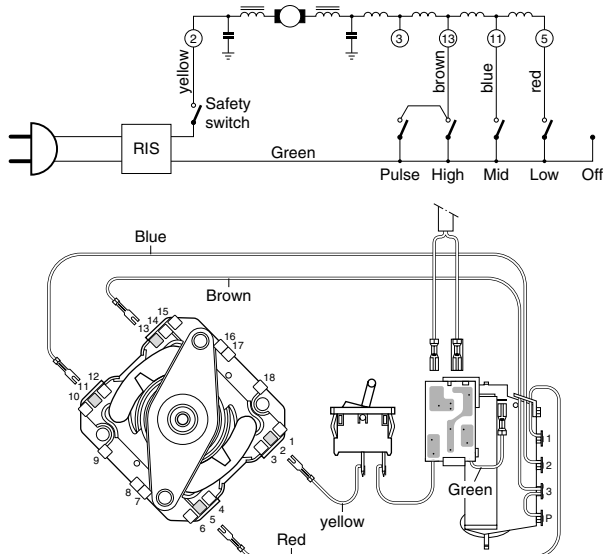

Spare parts:

Circuit breaker 5A	(110-127 V)	= 4206 136 49510
Circuit breaker 2,5A	(220-240 V)	= 4206 136 49520

RIS = radio interference suppressor.

