



Philips Consumer Lifestyle

# Service Manual

## PRODUCT INFORMATION

### General:

- Rechargeable
- World wide automatic voltage selection
- Washable
- Charge indication
- Battery low indication

### Safety information

- This product meets the requirements regarding interference suppression on radio and TV.
- After the product has been repaired, it should function properly and has to meet the safety requirements as officially laid down at this moment.

## TECHNICAL INFORMATION

- Voltage : 100 - 240 Volt / 50 - 60 Hz
- Shaving heads : HS85
- Charging time : 8 hours
- Shaving time : 30 minutes
- SAP coding : HS8020


## DISASSEMBLY- AND RE-ASSEMBLY ADVICE

- Remove shaving unit, to prevent damaging during repairing.
- Remove the 2 screws on top of the shaver.
- Remove the additive tubes and the IM cap.

## REPAIR INSTRUCTION

### Cleaning shaving heads


- Turn head clockwise and take off.
- Take cutter out and clean it with the brush.

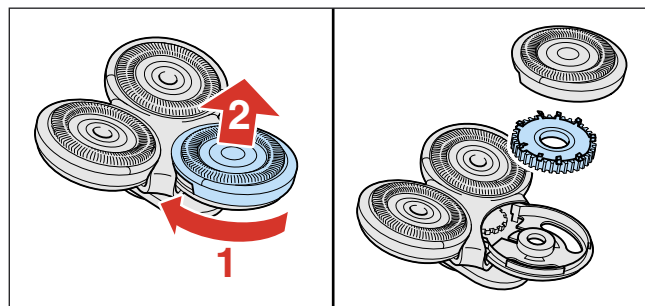

- Place cutter back.
- Place head back and fix it by turning the head anticlockwise.

## OPTIONAL (accessories)

- Pouch : 4222 036 14360

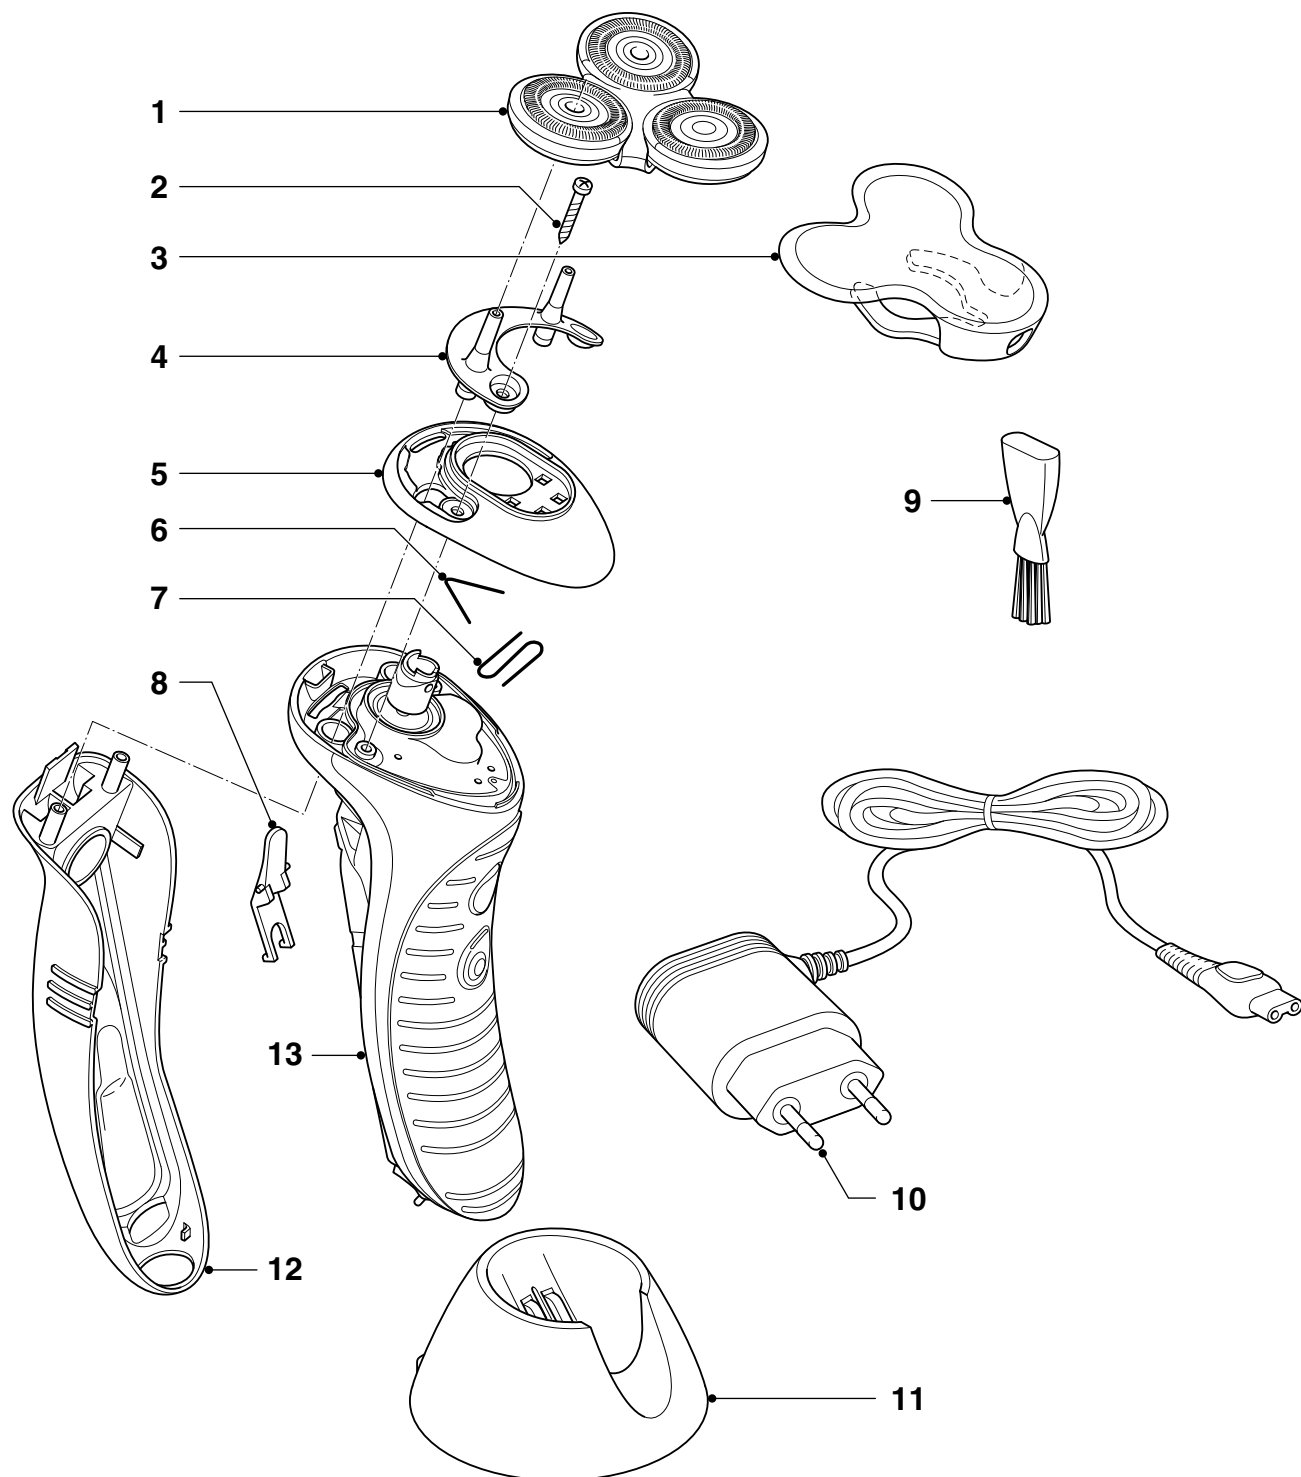

| Pos | Service code   | Description    |
|-----|----------------|----------------|
| 1   | 4222 036 14220 | Shaving unit   |
| 2   | 4822 502 14545 | Screw          |
| 3   | 4222 036 14210 | Protecting cap |
| 4   | 4222 036 14230 | Additive tubes |
| 5   | 4222 036 14250 | IM cap assy    |
| 6   | 4222 036 14280 | V-spring       |
| 7   | 4222 036 14270 | Z-spring       |
| 8   | 4222 036 14290 | Additive lever |
| 9   | 4222 036 02770 | Brush          |

| Pos | Service code   | Description          |
|-----|----------------|----------------------|
| 10  | 4222 036 04080 | Power plug U1 EUR    |
|     | 4222 036 04090 | Power plug U1 GBR    |
|     | 4222 036 04850 | Power plug U1 KOR    |
|     | 4222 036 05110 | Power plug U1 CAN/TW |
|     | 4222 036 05160 | Power plug U1 NOR    |
|     | 4222 036 03870 | Power plug U1 JAP    |
| 11  | 4222 036 05120 | Power plug U1 AUS/NZ |
|     | 4222 036 14310 | Stand LE             |
| 12  | 4222 036 16450 | Cartridge            |
| 13  | 4222 036 19760 | Basic body           |
|     | 4222 036 14360 | Pouch                |